

INSTALLATION INSTRUCTIONS



ELECTRICAL SHOCK HAZARD

READ, UNDERSTAND, and FOLLOW these instructions before installing the equipment.

WARNING


Disconnect the Electrical supply power at the service panel (fuse or circuit breaker box). Failure to do so could result in serious injury or death. Only qualified electricians should install this fixture and the installation **MUST** conform to the Electrical Code and all local codes and ordinances. Ensure that only proper tools, materials, and equipment are used to complete the installation.

SAFETY


- Proper grounding is required to ensure personal safety.
- Fixture should be mounted in locations where unauthorized personnel will not readily subject it to tampering.
- Do not use this equipment for anything other than its intended purpose.
- Servicing this equipment should be performed by qualified service personnel.
- Save these instructions.

INSTALLATION


- Remove the lens by removing the 4 screws that holds the lens
- Remove the reflector by removing the 2 screws that holds the reflector
- Knock out appropriate holes around outlet hole in rear housing

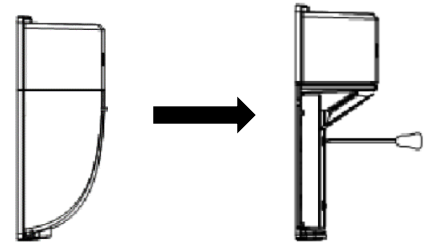

- Fasten the rear housing to the junction box using the screws supplied with the junction box
- Make appropriate wiring connections as per wiring diagram. Ensure to use 90°C minimum rated wire connectors.



- To ensure rain tight seal, apply silicone caulking around back edges of the fixture
- Reattach the reflector and the lens

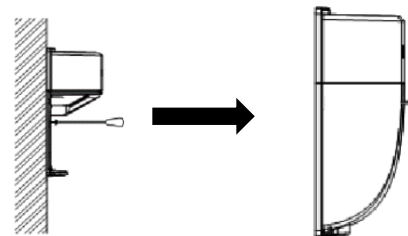

WIRING

- Check that the line voltage is correct.
- Connect fixture **GROUND** (green) wire to power supply **GROUND** (green) wire.
- Connect fixture **WHITE** wire to power supply **NEUTRAL** wire.
- Connect fixture **BLACK** wire to power supply **LINE** wire

