

INSTALLATION INSTRUCTIONS



ELECTRICAL SHOCK HAZARD

READ, UNDERSTAND, and FOLLOW these instructions before installing the equipment.

WARNING

Disconnect the Electrical supply power at the service panel (fuse or circuit breaker box). Failure to do so could result in serious injury or death. Only qualified electricians should install this fixture and the installation **MUST** conform to the Electrical Code and all local codes and ordinances. Ensure that only proper tools, materials, and equipment are used to complete the installation.


SAFETY

- Proper grounding is required to ensure personal safety.
- Fixture should be mounted in locations where unauthorized personnel will not readily subject it to tampering.
- Do not use this equipment for anything other than its intended purpose.
- Servicing this equipment should be performed by qualified service personnel.
- Save these instructions.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
- Changes or modifications to this unit not expressly approved by the party responsible for compliance Could void the user authority to operate the equipment.
- Min 75 °C supply conductor.

INSTALLATION


Suspended Mount

1. Screw and tighten the hook adaptor onto the fixture.
2. Hang the fixture at the intended location using chains or cables.
3. Make appropriate wiring connections as per wiring diagram.

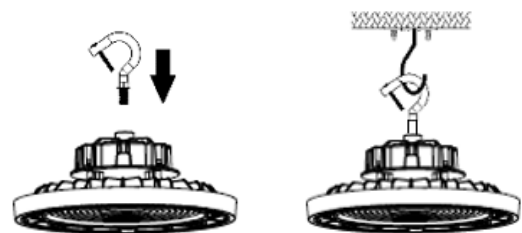

Yoke Mount (Sold Separately)


1. Attach the yoke bracket to the fixture.
2. Secure the yoke bracket to the mounting surface with the appropriate hardware and methods for the given ceiling type.
3. Make appropriate wiring connections as per wiring diagram.
4. If desired, untighten the yoke bracket screws and adjust the fixture's orientation to the desired angle and retighten screws.

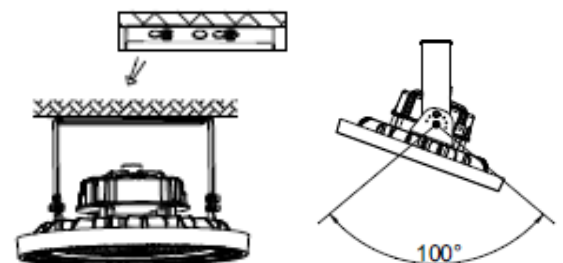

INSTALLATION INSTRUCTIONS


Pipe Pendant Mount with Junction box (Sold Separately)

1. Mount the junction box onto the fixture.
2. Insert pipe end into the top hole of the junction box.
3. Make appropriate wiring connections as per wiring diagram.

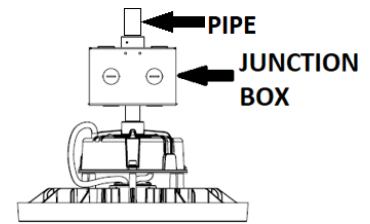


Reflector Assembly (Sold Separately)

1. Attach the Reflector onto the luminaire frame using the included hardware.



Motion Sensor (Sold Separately)


1. The fixture comes with the sensor receptacle installed, unscrew the 1/2" knockout using screwdriver, and screw in the sensor.
2. The sensor is set to the default setting, it can be programmed via a remote control that is not included the standard packing.

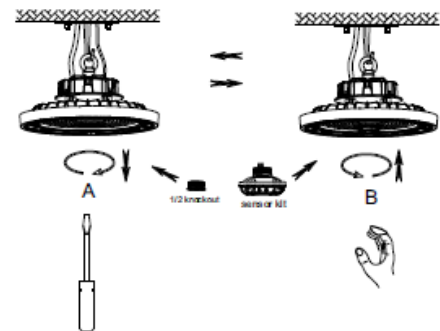

CCT & LUMEN SELECTABLE SWITCHES

CCT selectable switch is included in every luminaire. It is accessed inside during installation. The switch can be set to 4000K, and 5000K CCT. **4000K is default.**

Lumen selectable switch is included in some models. It is accessed inside during installation. Lumens vary depending on model. **Max lumen setting is default.**



WIRING

- Check that the line voltage is correct.
- Connect fixture **GROUND** (green) wire to power supply **GROUND** (green) wire.
- Connect fixture **WHITE** wire to power supply **NEUTRAL** wire.
- Connect fixture **BLACK** wire to power supply **LINE** wire
- The fixture includes 0-10V dimming functionality, connect **GREY** and **VIOLET** wires to the dimming controller.

