

## INSTALLATION INSTRUCTIONS



### ELECTRICAL SHOCK HAZARD

**READ, UNDERSTAND, and FOLLOW** these instructions before installing the equipment.

## WARNING

Disconnect the Electrical supply power at the service panel (fuse or circuit breaker box). Failure to do so could result in serious injury or death. Only qualified electricians should install this fixture and the installation **MUST** conform to the Electrical Code and all local codes and ordinances. Ensure that only proper tools, materials, and equipment are used to complete the installation.

## SAFETY

- Proper grounding is required to ensure personal safety.
- Fixture should be mounted in locations where unauthorized personnel will not readily subject it to tampering.
- Do not use this equipment for anything other than its intended purpose.
- Servicing this equipment should be performed by qualified service personnel.
- Save these instructions.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
- Changes or modifications to this unit not expressly approved by the party responsible for compliance Could void the user authority to operate the equipment.



## INSTALLATION

- Before attempting any installation, ensure that the electrical supply is switched off and the circuit fuses are removed or the circuit breaker is in the "OFF" position.
- Option: Insert the reflector wings flange inside the fixture housing. *Reflector Wings sold separately.*
- For **suspended mounting**, remove lens from fixture and secure cables to keyholes. Cables sold separately.
- For **surface mounted**, install the housing brackets to the ceiling.
- Make connections as per wiring diagram. Use a BX cable or power cord to connect the wires to the access plate as per Electrical Codes.

Fixtures	Maximum Fixtures for Continuous Row
SLH4-LED	16

NOTE: A white folding junction box cover comes included with the fixture for a clean installation.

- Snap the fixture to the housing brackets.

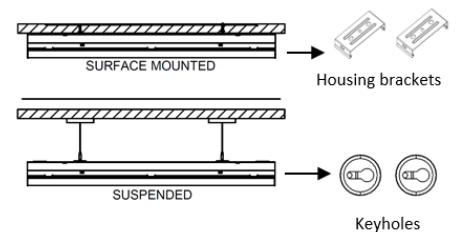


## INSTALLATION INSTRUCTIONS

### CCT & LUMEN SELECTABLE SWITCHES

- CCT selectable switch is accessed inside the luminaire housing. Can switch between 3K, 4K, and 5K CCT. 4K is default.
- Lumen selectable switch is also accessed inside luminaire housing. Can switch the lumen intensity that is equivalent to 50W, 40W, 30W or 20W of power.

### REFLECTOR WINGS (OPTIONAL)

- Insert the reflector wings flange inside the fixture housing.

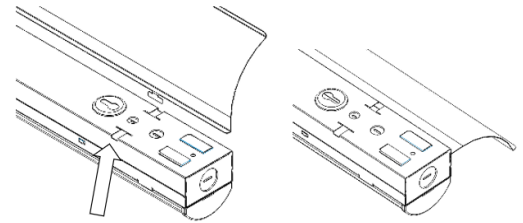

### WIRE CAGE (OPTIONAL)

- Place wire cage over the fixture and screw the clips on to the mounting surface.
- If connecting fixtures in a continuous row, remove end caps of wire cages and connect the wire cages together using the 052956 hardware kit. Each kit includes 3 clips and 3 screws to attach the wire cages together and is sold separately.



### WIRING

- Check that the line voltage is correct.
- Connect fixture **GROUND** (green) wire to power supply **GROUND** (green) wire.
- Connect fixture **WHITE** wire to power supply **NEUTRAL** wire.
- Connect fixture **BLACK** wire to power supply **LINE** wire
- The fixture includes 0-10V dimming functionality, connect **GREY** or **PINK** and **VIOLET** wires to a 0-10V dimming controller (optional).

