

The AWL-LED26 is a wall pack with an adjustable head that can be aimed straight down for dark sky requirements or aimed out to deliver the light where required.



APPLICATIONS

Ideal for use on outdoor walls along perimeters of buildings, townhouses, condominiums, schools.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

Die cast aluminum housing with tamperproof stainless steel hardware. Clear tempered glass lens with a gasket. There are 4 conduit entries. The unit has a unique hanging hook assembly for easy installation and a leveling bubble on the back box for proper alignment. Photocell is included.

LED configuration

The AWL-LED-26W has one LED Chip On Board (COB) that delivers minimum of 3,566 lumens. The LEDs have a color temperature of 5000K as standard. 3000K and 4000K also available. The LEDs have a CRI of greater than 70 and an operating temperature range of -40°C to +40°C.

Adjustable head

The fixture can be aimed 0° - 90° delivering more lumens on the ground where needed.

Electrical

Total system wattage of the unit is 27W. The standard unit has a high efficiency dimmable driver that operates at 120 - 277V. 347V drivers are also available.

Finish


Standard finish is bronze, white and black. Please consult factory for custom color.

Accessories

On/Off Sensor and 0 - 10V Dimmable Smart Sensor.

Equivalent to	up to 75W MH
Input Watts	27W
Lumens	3566
Efficiency	130 lumens
Operating Temperature	-40°C to +40°C
Certification	cULus, IP65
LED life	100,000 hours
Color Temperature	5000K (standard) 4000K, 3000K (Option)
Warranty	5 Years

DIMENSIONS

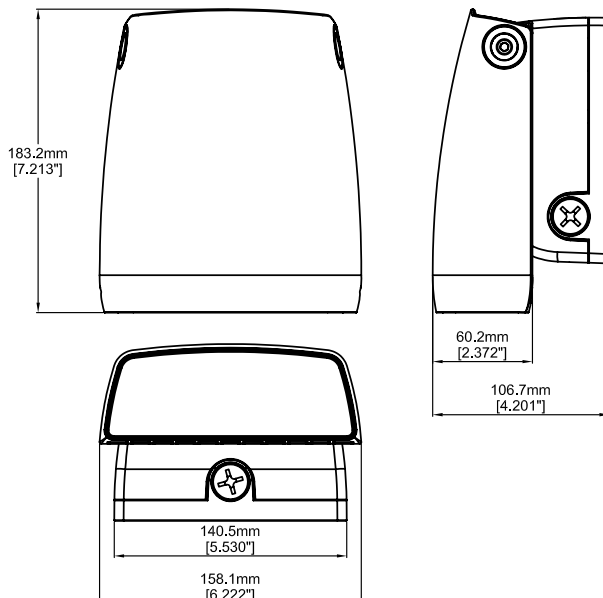


Shown with Optional Motion Sensor




INSTALLATION INFORMATION

1. Open fixture, mount back box to junction box



2. Rest fixture onto hook and connect wires




3. Reattach fixture to back box



ACCESSORIES


MS180DIM 0 - 10V Dimmable Smart Sensor (DMS)

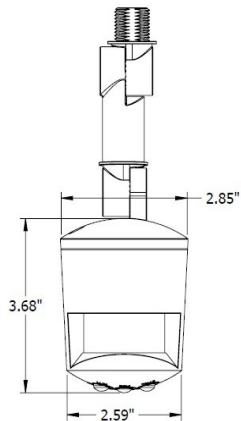

Dimmable Smart Sensor

The MS180DIM is a fully adjustable, dimmable smart sensor that allows you to provide reduced light levels as low as 10% when no motion is detected.

MS180S On/Off Sensor (SMS)

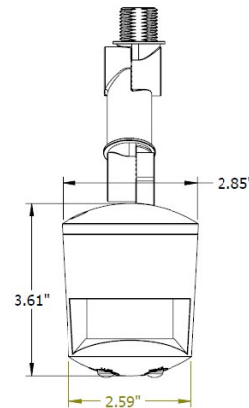

On/Off Sensor

The MS180S is a fully adjustable motion sensor that can be set for dusk to dawn operation or other custom applications.

Features: Dimmable Smart Sensor

- Adjustable light levels ensure fixture is fully on when needed and dimmed or off when not.
- Smart dimming reduces electrical load and heat generated by the fixture resulting in increased fixture life.
- Over 92% energy savings compared to traditional wall packs.
- Sensor has an extension arm with two rotatable joints that allow mounting from the bottom conduit access or the side conduit access of fixture.
- Daylight sensor without smart dimming (MS180S) also available in the same design.

Contact us to learn more.

PHOTOMETRIC DATA

CATALOG NUMBER: AWL-LED26-A-5K-BRZ


FILENAME: AWL-LED26-A-5K-BRZ-PC.IES
 IESNA:LM-63-1995
 [TESTLAB] UL Verification Services (Guangzhou) Co., Ltd.
 [TESTDATE] 2014-12-15
 [ISSUE DATE] 2014-12-15

[LUMCAT] AWL-LED26-A-5K-BRZ
 [LUMINAIRE] AWL SERIES
 [LAMP CAT] CLL030-1212A1
 [LAMP]

SUMMARY DATA


EFFICIENCY (Total): - 303473.7 %
 EFFICIENCY (Down / Up):- 303319.4 % / - 154.2 %
 EFFICIENCY (Street / House): 0.0 % / 0.0 %
 LUMENS/LAMP: -1
 NO. OF LAMPS: 1
 LUMINOUS OPENING: RECTANGULAR
 Width: 0.03 (Meters)
 Length: 0
 Height: 0.06
 INPUT WATTS: 26.65

PLANE & CONE DIAGRAM

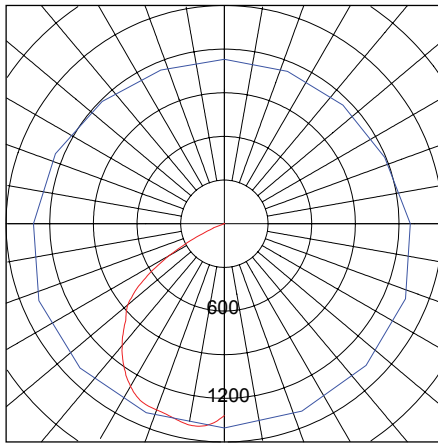

MAX CANDLEPOWER: 1404.463

ISO-ILLUMINANCE DIAGRAM

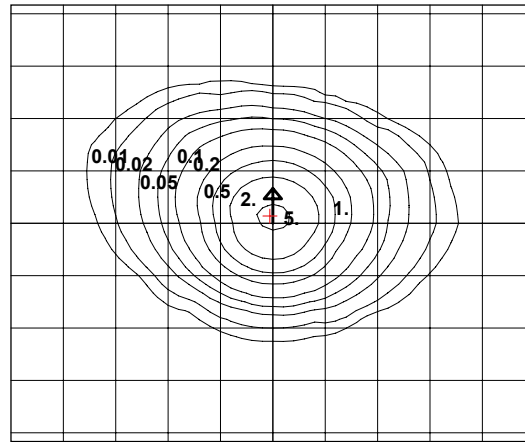


Mounting Height	Multiplier
10	2.250
15	1.000
20	0.563
25	0.360
30	0.250
35	0.184
40	0.141
45	0.111
50	0.090

+ = Point of max candela

Mounting Height = 15 Feet. Each box represents one mounting height.

ORDERING GUIDE



VOLTAGE

A - 120V*
 F - 277V
 C - 347V

COLOR TEMP

5K - 5000K*
 4K - 4000K
 3K - 3000K

FINISH

BRZ- BRONZE*
 BLK - BLACK*
 WHT - WHITE*
 CC - CUSTOM COLOR

OPTIONS

DMS - Dimmable Sensor
 SMS - On/Off Sensor
 Photocell*
 10KV Surge Suppressor

* Standard configuration

** Chosen photocell option must be the same as voltage