



JAG1S-LED

Selectable Area Light



The JAG1S-LED is an exceptionally versatile lighting fixture, featuring field-adjustable beam distribution, high efficiency, and advanced controls to optimize lighting layouts for any area light application. Additionally, the standard fixture includes selectable features such as color selection and wattage selection, making it one of the most feature-rich area lights available on the market.

(Shown with Direct Mount for Round/Square Poles)

IDEAL APPLICATIONS

- ✔ Commercial Plazas

✔ Dealerships

✔ Schools and Campuses
- ✔ Parking Lots

✔ Transit Stations

✔ Pathways

✔ Perimeter Lighting

SPECIFICATIONS

| | LED100A60 | LED150A100 |
|-------------------------------|--|----------------------|
| PERFORMANCE | | |
| Light Output | 16700/13400/10000 lm | 25000/20000/16700 lm |
| Efficacy | 167 lm/W | |
| CCT | CCT Selectable - 3000K/4000K/5000K | |
| Beam Distribution | Variable Distribution - VD1 (Type III/Type IV/Type V); VD2 (Type II/Type III/Type IV) (Optional) | |
| | Adjust beam distribution effortlessly using a switch—no need to swap or reorient optics. | |
| LED Lifetime (L85) | 100,000 Hours | |
| CRI | 84 | |
| ELECTRICAL | | |
| Wattage | 100/80/60 W | 150/120/100 W |
| Voltage | 120-277V, 480V | |
| Surge Protection | 6 kV Internal & 10 kV External per UL1449 | |
| Power Factor | 0.99 | |
| THD | 4.49% | 4.36% |
| Dimming | 0-10 V (0-100%) | |
| Replaces Up to | 250W MH | 400W MH |
| Cable Specs | Input Power - 1 m Cabtire Cable (3x18 AWG) Dimming - 1 m Cabtire Cable (2x18 AWG) | |
| AMBIENT OPERATING TEMPERATURE | | |
| Fixture | -40°F to +122°F (-40°C to 50°C) | |
| DEFAULT SETTINGS | | |
| CCT | 4000K | |
| Wattage | 100W | 150W |
| Beam Distribution | VD1 - Type III | |
| | VD2 - Type II | |

| CERTIFICATIONS | | | | | |
|--|---|-----------------|-------|-----------------|-------|
| cULus Certified as per UL 1598 & CSA C22.2, IP65, Wet Location, DLC Premium | | | | | |
| FACTORY INSTALLED CONTROLS | | | | | |
| DHFS Motion Sensor, PBLs Control, Twist Lock Photocell, 3 PIN or 7 PIN Receptacle with Shorting Cap ANSI C136 compliant, 20 kV Surge Protection (120-277 V) | | | | | |
| OPTIONS SOLD SEPERATELY | | | | | |
| Slip Fitter, Direct Mount for Round/Square Poles, Trunnion Mount, Yoke Mount, House Side Cutoff, Side Cutoff, DHFS Motion Sensor Remote Control, PBLs Remote Control | | | | | |
| CONSTRUCTION | | | | | |
| Housing | Die-cast Aluminum | | | | |
| Lens/Optics | Polycarbonate Lens/Optics with integral field-adjustable light distribution allows beam distribution changes without replacing or re-orienting the lens/optics. | | | | |
| Paint | Weather and Corrosion Resistant Polyester Powder Coat Finish | | | | |
| Housing Finish | Bronze, Custom Colors | | | | |
| WEIGHT (FIXTURE ONLY) | | | | | |
| 10.58lbs (4.8kg) | | | | | |
| MAX AMPERAGE DRAW (A) | | | | | |
| | 120V | 208V | 240V | 277V | 480V |
| LED100A60 (100W) | 0.875 | 0.505 | 0.438 | 0.379 | 0.219 |
| LED150A100 (150W) | 1.313 | 0.757 | 0.656 | 0.569 | 0.328 |
| LUMEN MAINTENANCE | | | | | |
| | L90 | L80 | | L70 | |
| LED100A60 & LED150A100 | 68,000 Hours | > 100,000 Hours | | > 120,000 Hours | |

Electrical and Light Performance data is based on LM79 test report at 4000K, Type IV and 120V.
Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 calculations.



ORDERING GUIDE

| JAG1S | | | VK | | | DIM | | |
|---------|-----------|---------------------------|---|---|--|---------------------|--|--|
| Fixture | Wattage | Voltage | Color Temp. | Beam Distribution | Finish | Dimming | Controls | Surge Protection |
| JAG1S | LED100A60 | B - 120-277V ^a | VK - CCT Selectable (3000K/ 4000K/ 5000K) | VD1 - Variable Distribution ^a (Type III/Type IV/ Type V) | BRZ - Bronze ^a CST - Custom Finish | DIM - 0-10V Dimming | Blank - No Controls ^a PBLs - Photocell Beam Lumen Sensor ^c DHFS - Dimming High Frequency Motion Sensor ^d PC - Photocontrol 3PIN - 3PIN Receptacle 7PIN - 7PIN Receptacle | SP10 - 10kV Surge Protection ^a SP20 - 20kV Surge Protection ^b |

^a - Standard Configuration

^b - B voltage (120-277V) is only applicable to SP20

^c - One RC107 remote control is required for PBLs

^d - One RC100 remote control is required for DHFS







STOCK CODE

| | |
|--------|---|
| 053114 | JAG1S-LED100A60-B-VK-VD1-BRZ-DIM-SP10 |
| 053115 | JAG1S-LED150A100-B-VK-VD1-BRZ-DIM-SP10 |
| 053183 | JAG1S-LED150A100-L-VK-VD1-BRZ-DIM-SP10 |
| 053186 | JAG1S-LED100A60-L-VK-VD1-BRZ-DIM-SP10 |
| 053190 | JAG1S-LED100A60-B-VK-VD1-BRZ-DIM-PBLs-SP10 |
| 053192 | JAG1S-LED150A100-B-VK-VD1-BRZ-DIM-PBLs-SP10 |

NOTE:

- "VD1" offers selectable beam distribution options (Type III, Type IV, Type V).
- For **Type II** beam distribution, please order "VD2" which offers selectable beam distribution options (**Type II**, Type III, Type IV).
- "PBLs" allows **remote** adjustment of the photocell, beam distribution, and lumen output.

ACCESSORIES SOLD SEPARATELY

| | | | | | |
|--------|---|---|--------|--|---|
| 053184 | YOKE MOUNT BRZ F/JAG1 |  | 053179 | JAG1 HOUSE CUTOFF SHIELD BRZ |  |
| 052004 | SLIP FITTER BRZ F/HELIX1/2 & JAG1/2 |  | 053180 | JAG1 SIDE CUTOFF SHIELD BRZ |  |
| 052002 | DIRECT MOUNT F/RND & SQR POLE BRZ F/HELIX1/2 & JAG1/2 |  | 052267 | RC-100 MOTION SENSOR REMOTE CONTROL |  |
| 052003 | DIRECT TRUNNION MOUNT BRZ F/HELIX1/2 & JAG1/2 |  | 052929 | RC-107 PHOTOCONTROL REMOTE CONTROL |  |

| EPA (ft ²) | | | |
|------------------------|---------|----------|----------|
| | Tilt 0° | Tilt 45° | Tilt 90° |
| JAG1S | 0.59 | 1.55 | 2.18 |
| JAG1S (with HCO) | 0.82 | 1.55 | 2.18 |
| JAG1S (with SCO) | 1.21 | 1.62 | 2.18 |

*EPA calculation includes both fixture and slipfitter mount

PHOTOCELL/BEAM DISTRIBUTION/LUMEN SENSOR (PBLs)

PBLs Controller allows the Installer to adjust beam, lumens and photocontrol settings using a remote control after installation.



| PHOTOCELL/BEAM DISTRIBUTION/LUMEN SENSOR (PBLs) | |
|---|---|
| Input Power | LED Input: Max. 250VDC 3A; Sensor Input: 10-14VDC, >30mA |
| Input Current | Max. 25mA |
| Control Output | 0-10V Output Signals |
| Operate Level | 10-20LUX ON, 30-80LUX OFF |
| Humidity | Max. 99% RH |
| Operating Temperature | -40°F to +122°F (-40°C to 50°C) |

| RC107 REMOTE SEPCIFICATIONS (For PBLs Controller) | | |
|---|----------------------------------|---|
| DEFAULT FACTORY SETTING | | FEATURES |
| Task Light Level | 100% |  <p>ON: Turn on the fixture, brightness is set according to task level. OFF: Turn off the fixture, the fixture is permanently off. RESET: Task Light Level:100%; Hold Time: Disable; Photocell: Low; CCT:WW - Type III REPEAT: Send the same setting to different fixtures installed.</p> <p>HOLD TIME: The "hold time" starts to count right after the fixture turns on. When the "hold time is up, the fixture adjusts to 50% brightness until the light control turns the light fixture off.</p> <p>DISABLE: When you choose disabled, the fixture maintains the task light level</p> <p>LOW: When the ambient lux is less than 30lux, the fixture turn on at the task level you set, when the ambient lux is more than 50lux, the fixture turns off.</p> <p>MIDDLE: When the ambient lux is less than 80lux, the fixture turn on at the task level you set, when the ambient lux is more than 100lux, the fixture turns off.</p> <p>HIGH: When the ambient lux is less than 150lux, the fixture turn on at the task level you set, when the ambient lux is more than 180lux, the fixture turns off;</p> <p>DISABLE: Photoelectric switch disabled:</p> <p>Adjust Beam Distribution Setting: VD1: WW - Type III, NW - Type IV, CW - Type V, VD2: WW - Type II, NW - Type III, CW - Type IV</p> |
| Hold Time | Disable | |
| Photocell | Low | |
| Beam Distribution | VD1 - TYPE III; VD2 - TYPE II | |
| | | |
| | | Range: 50ft (15m) |


Note: Custom settings can be done based on requirements in the Factory.

DIMMING HIGH FREQUENCY MOTION SENSOR (DHFS)

DHFS Microwave motion sensor offers a range of control features based on motion detection allowing the Installer to adjust the brightness of the fixture, hold time and daylight settings using a remote control after installation.

DIMMING HIGH FREQUENCY MOTION SENSOR (DHFS)


| | |
|------------------------|---------------------------------|
| Power Supply | 12V-24V DC |
| High Frequency System | 5.8GHz +/- 75MHz |
| Dim Control Output | 0-10V, Max. 25mA |
| Detection Radius/Angle | Max. 26FT (8M)/360° |
| Mounting Height | Max. 40FT |
| Remote Range | 50FT (15M) |
| Humidity | Max. 95% RH |
| Operating Temperature | -40°F to +122°F (-40°C to 50°C) |

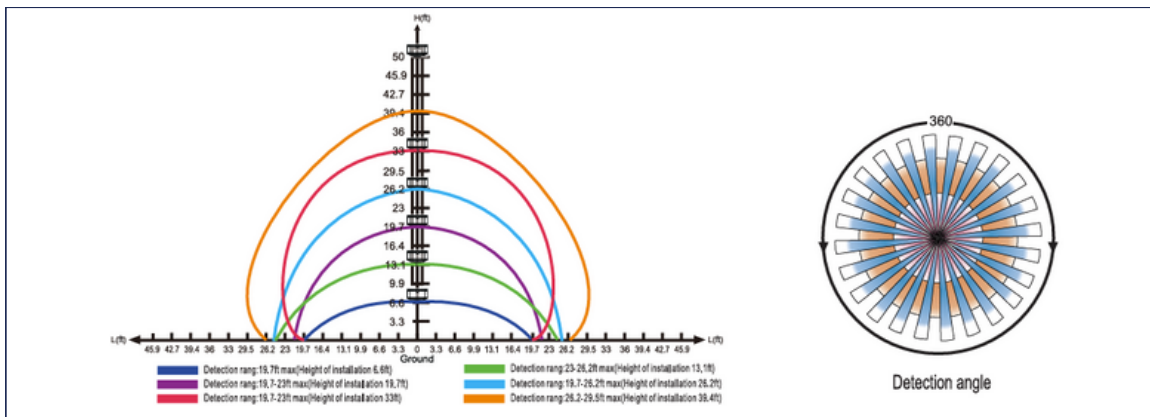


RC100 REMOTE SEPCIFICATIONS (For DHFS Controller)

| DEFAULT FACTORY SETTING | | FEATURES | |
|-------------------------|----------|---------------------------------|---|
| Brightness | 100% | | BRIGHTNESS: Sets the highest light fixture brightness when motion is detected. |
| Sensitivity | 100% | | SENSITIVITY: Sets the sensitivity to which the sensor will detect motion. |
| Hold Time | 5 Mins. | | HOLD TIME: The time the light fixture will remain at the brightness setting after it detects motion. |
| Daylight Sensor | ☀ | | DAYLIGHT SENSOR: The lux setting that the light fixture will turn on/off. If the ambient lux is more than the defined lux setting, the fixture & sensor function will turn off and remain off until the ambient lux is below the setting. To disable the lux sensor, select the SUN icon. To set the lux to match current room conditions, select the EYE icon. |
| Stand-by Dim | 30% | | STAND-BY DIM: The Dim level that the light fixture will dim down after the Hold Time has expired. To disable dimming and only have ON/OFF, select the 0% icon. |
| Stand-by Time | 60 Mins. | <p>Range: 50ft (15m)</p> | STAND-BY TIME: The time the light fixture will remain in the dim down state before it shuts off. To disable the light from shutting off, select the INFINITY icon. |

FIXTURE WITHOUT MOUNT

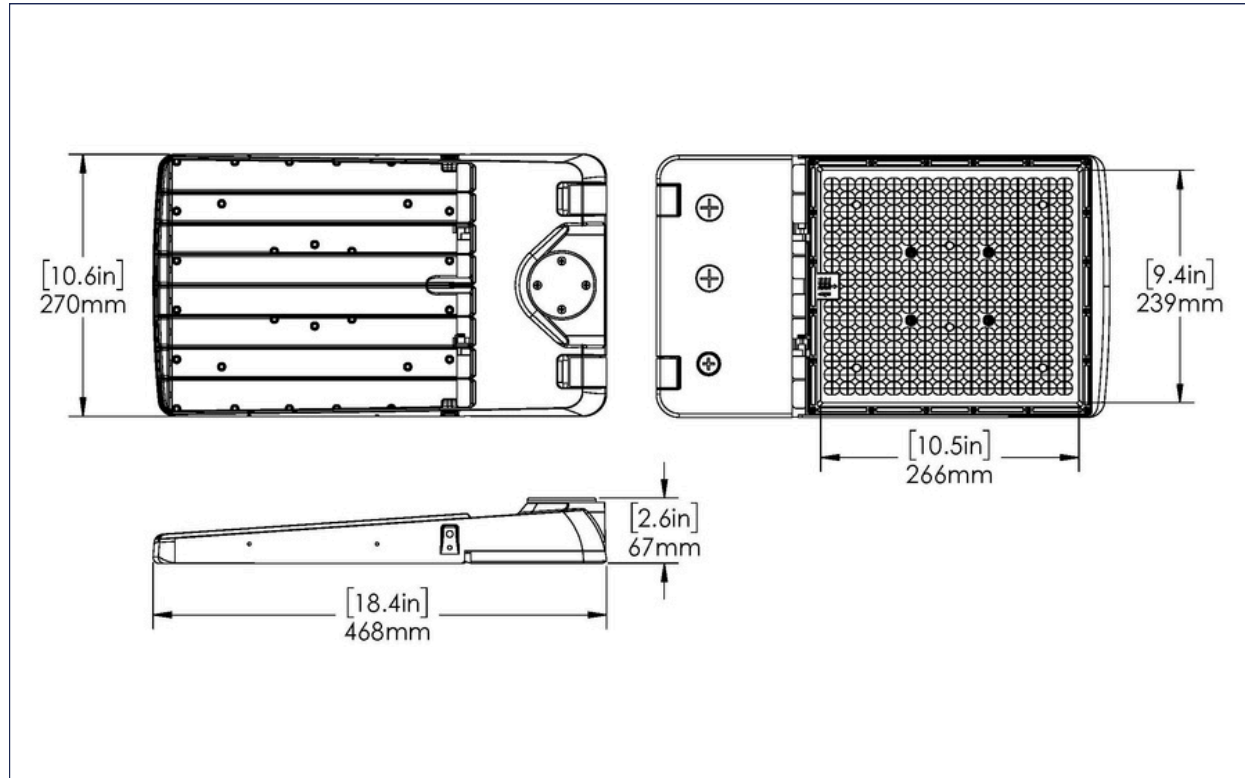


FIXTURE WITH YOKE MOUNT

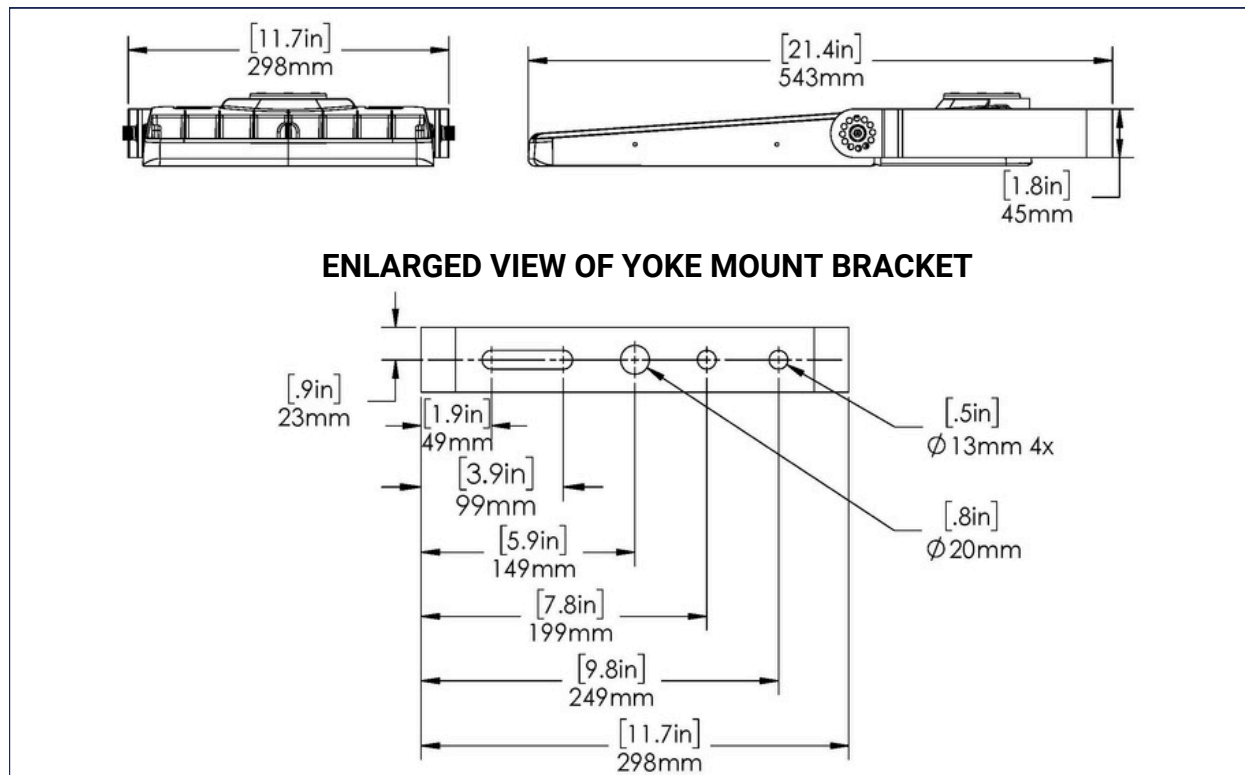


*Angle marking increment - 30°

FIXTURE WITH DIRECT MOUNT

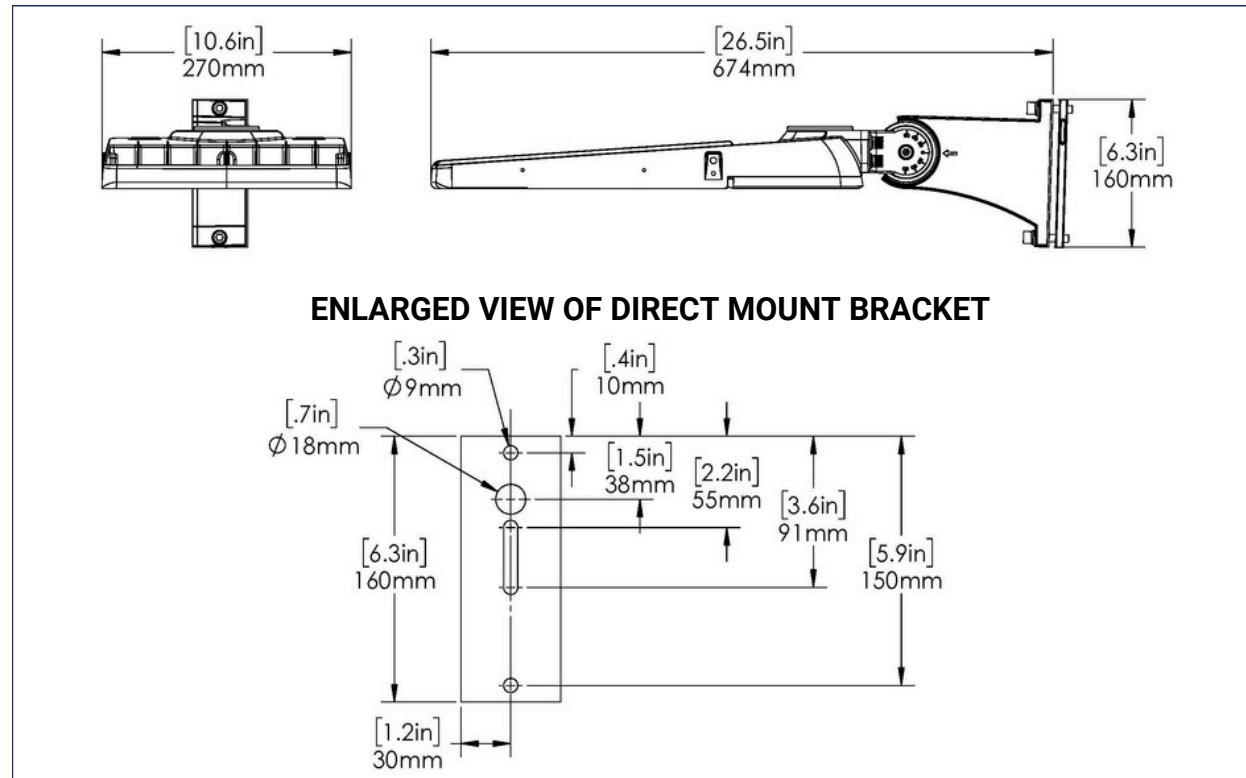


*Angle marking increment - 30°

FIXTURE WITH SLIPFITTER

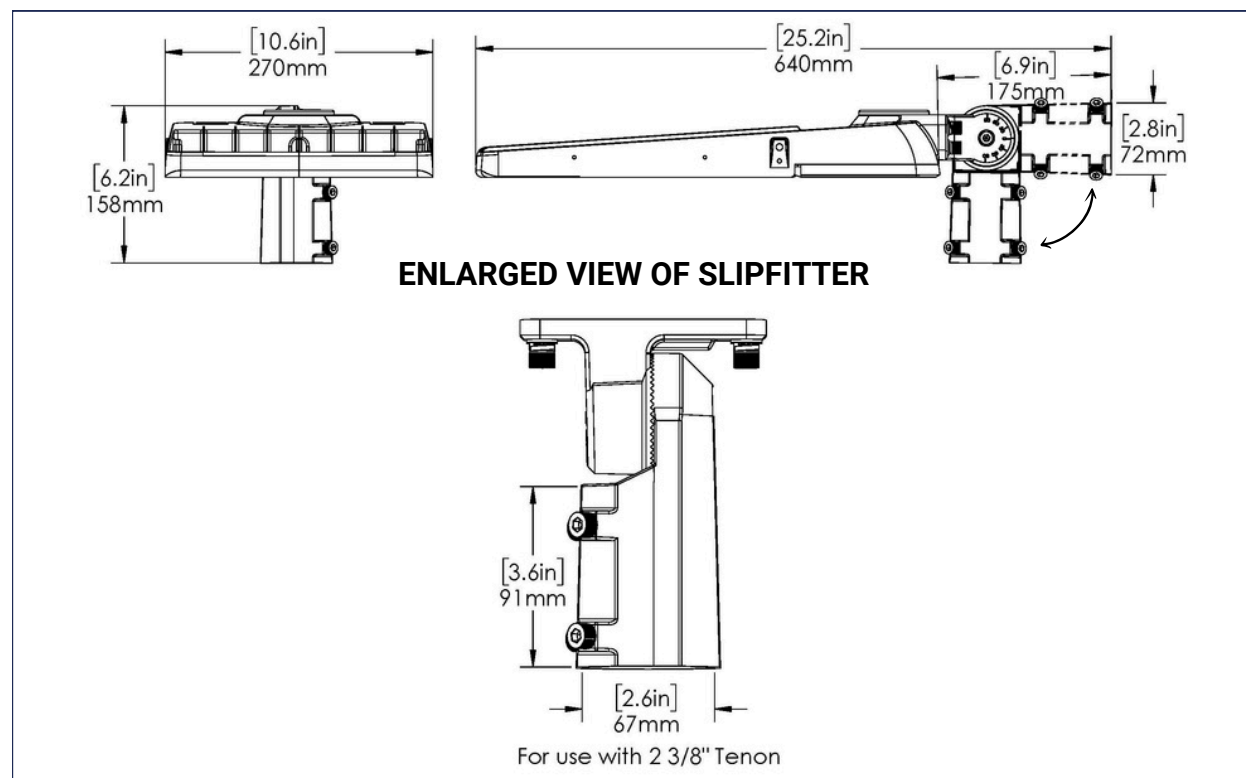


*Angle marking increment - 30°

FIXTURE WITH TRUNNION MOUNT

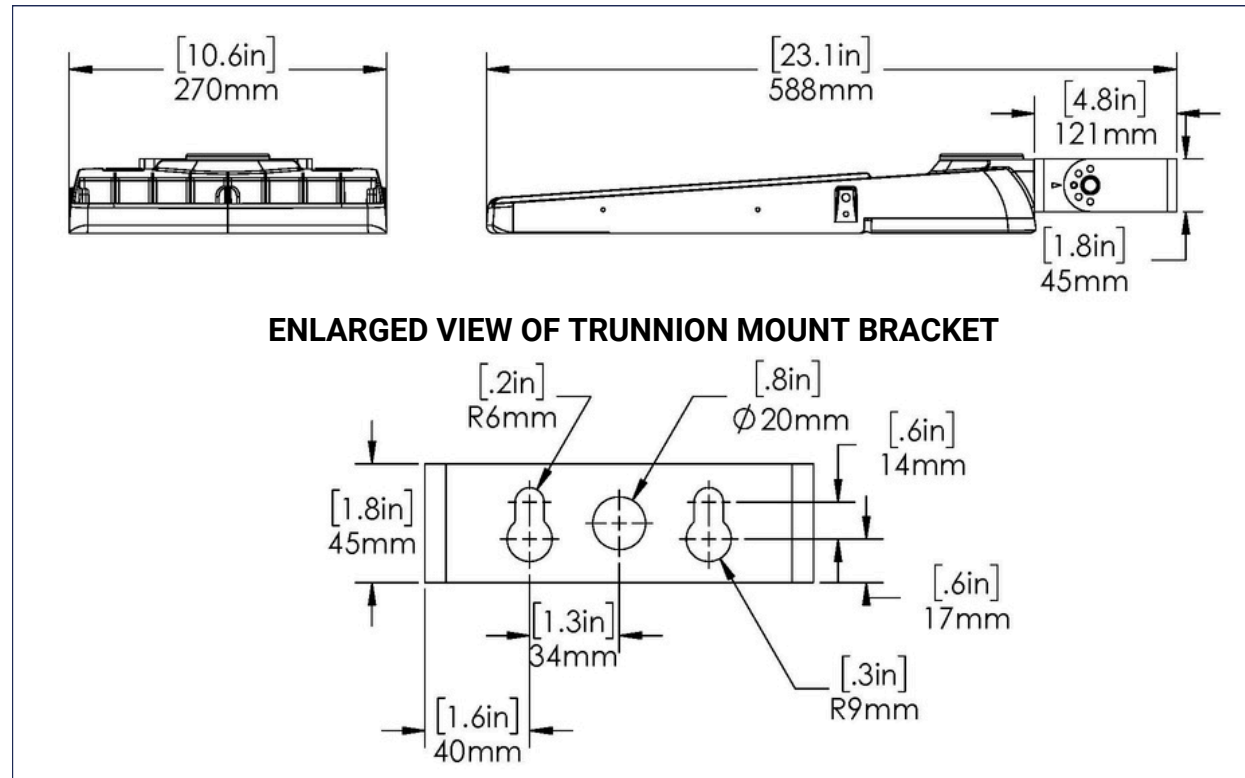


*Angle marking increment - 45°



FIXTURE WITH HOUSE SIDE CUTOFF (HCO)

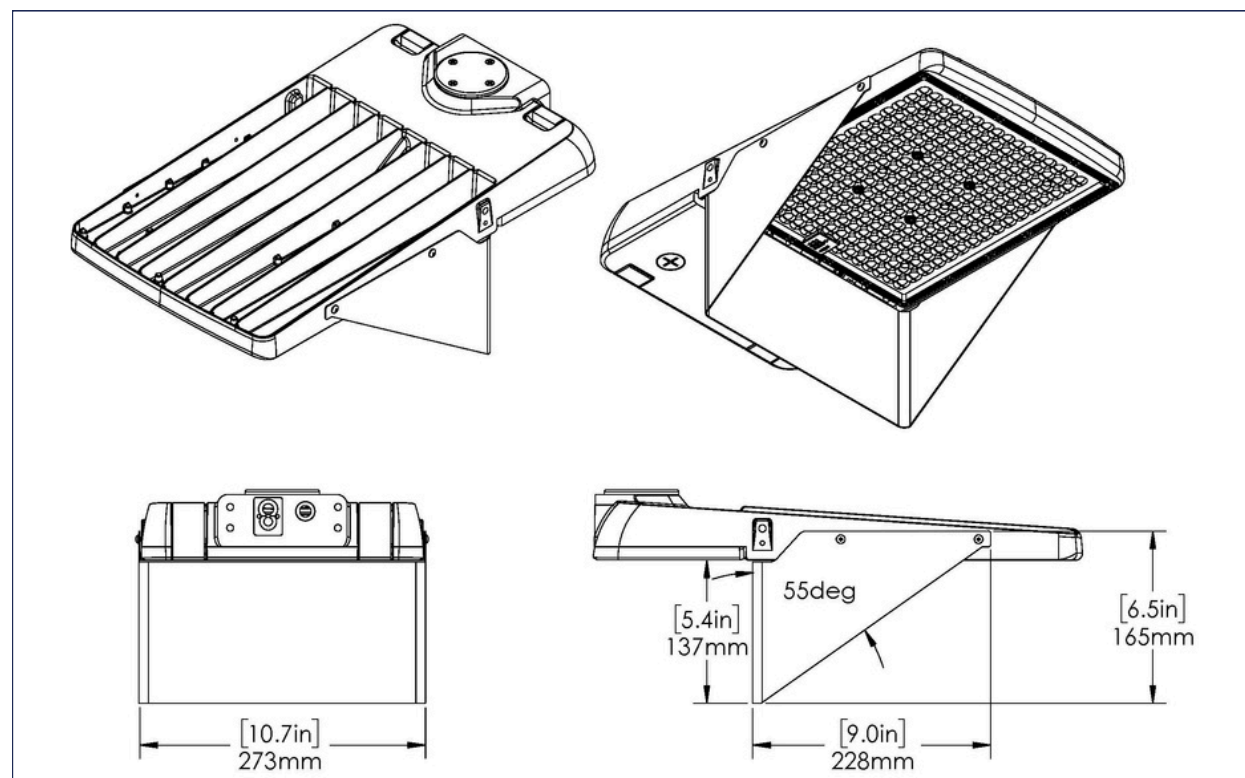

FIXTURE WITH SIDE CUTOFF (SCO)

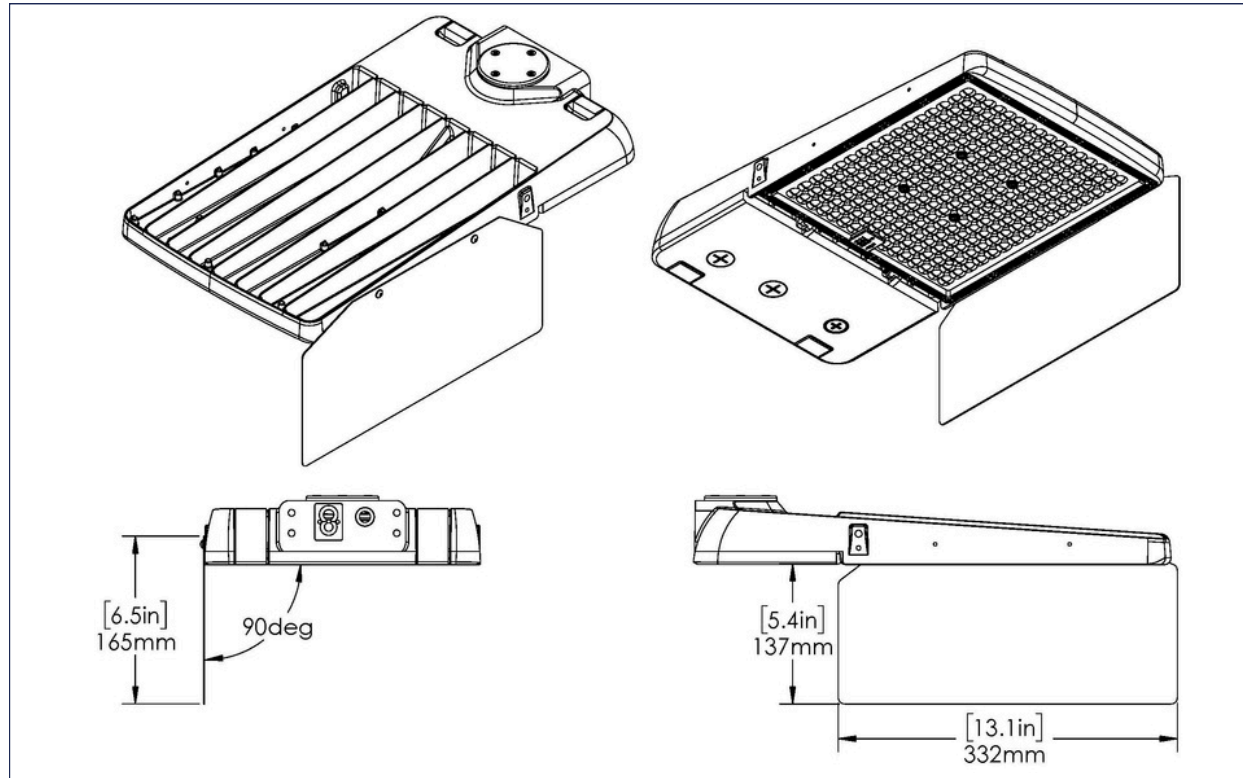


PHOTOMETRIC PLOTS

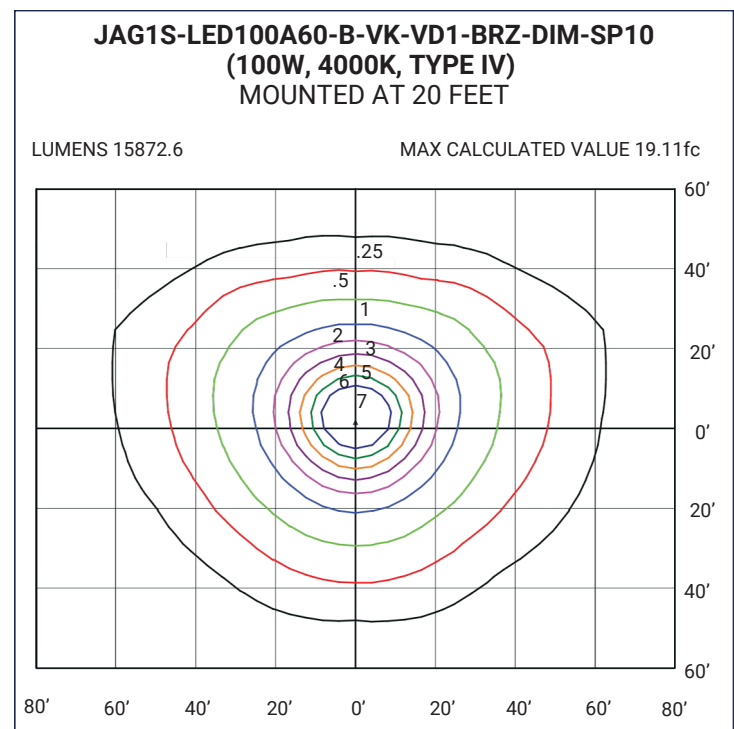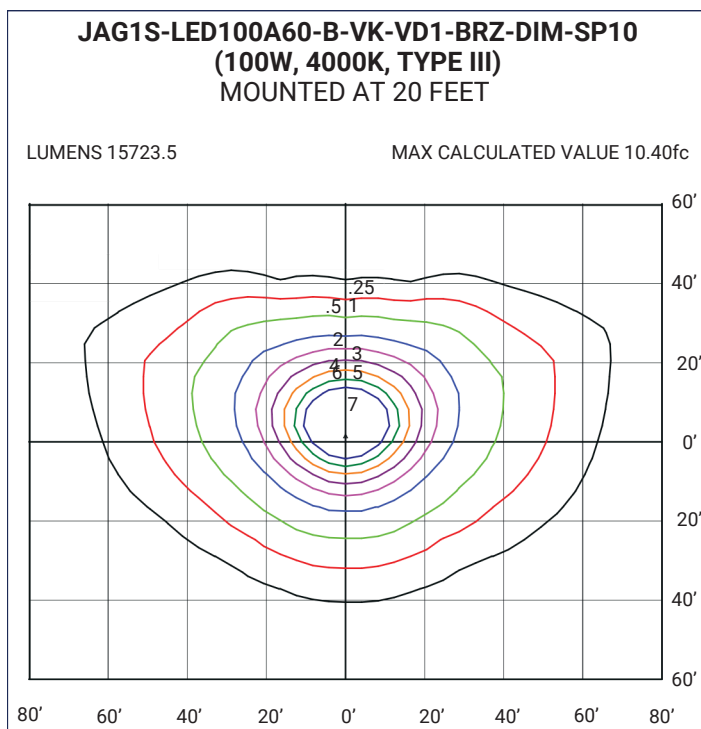

JAG1S-LED100A60-B-VK-VD1-BRZ-DIM-SP10
(100W, 4000K, TYPE V)
MOUNTED AT 20 FEET

LUMENS 15380.2


MAX CALCULATED VALUE 7.94fc

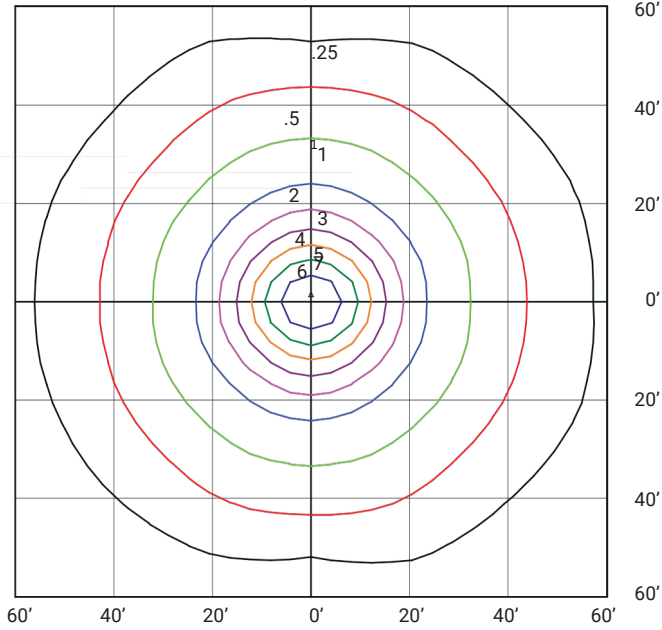

JAG1S-LED150A100-B-VK-VD1-BRZ-DIM-SP10
(150W, 4000K, TYPE III)
MOUNTED AT 24 FEET

LUMENS 22761.5


MAX CALCULATED VALUE 10.68fc

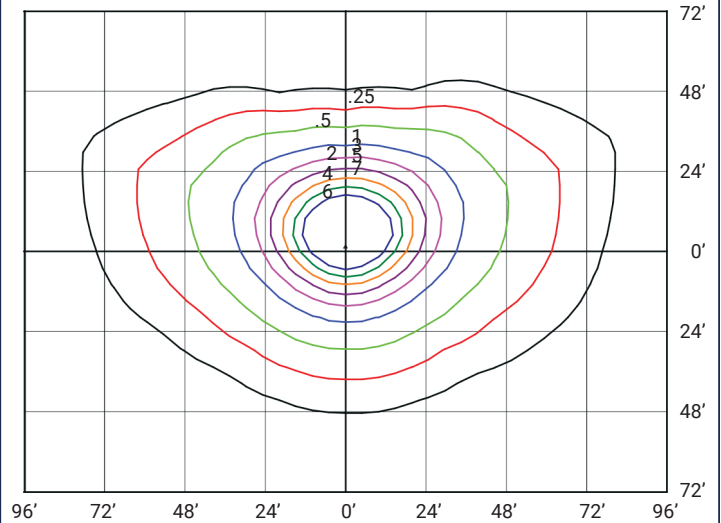

JAG1S-LED150A100-B-VK-VD1-BRZ-DIM-SP10
(150W, 4000K, TYPE IV)
MOUNTED AT 24 FEET

LUMENS 23493.8

MAX CALCULATED VALUE 9.50fc

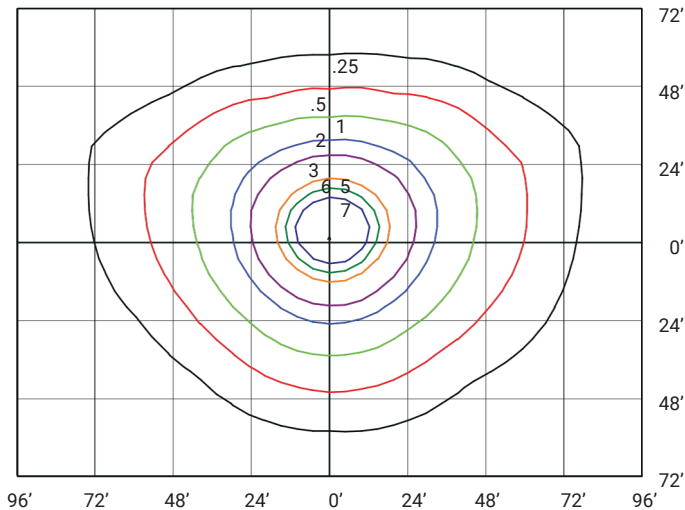

JAG1S-LED150A100-B-VK-VD1-BRZ-DIM-SP10
(150W, 4000K, TYPE V)
MOUNTED AT 24 FEET

LUMENS 23022

MAX CALCULATED VALUE 8.30fc

