

**INSTALLATION INSTRUCTIONS**

**ELECTRICAL SHOCK HAZARD**

**READ, UNDERSTAND, and FOLLOW** these instructions  
before installing the equipment.

**WARNING**

Disconnect the Electrical supply power at the service panel (fuse or circuit breaker box). Failure to do so could result in serious injury or death. Only qualified electricians should install this fixture and the installation MUST conform to the Electrical Code and all local codes and ordinances. Ensure that only proper tools, materials, and equipment are used to complete the installation.

**SAFETY**

- Proper grounding is required to ensure personal safety.
- Fixture should be mounted in locations where unauthorized personnel will not readily subject it to tampering.
- Do not use this equipment for anything other than its intended purpose.
- Servicing this equipment should be performed by qualified service personnel.
- Save these instructions.
- **MIN 90 °C SUPPLY CONDUCTOR**


**TOOLS REQUIRED**

- 1/8"Hex Key
- Wrench

**INSTALLATION**

1. Use the provided template to preinstall 3 anchor bolts.

Install the anchor bolts in concrete, with at least 1-1/2 ~2" protruding from concrete with threads free and clear of debris and dirt.

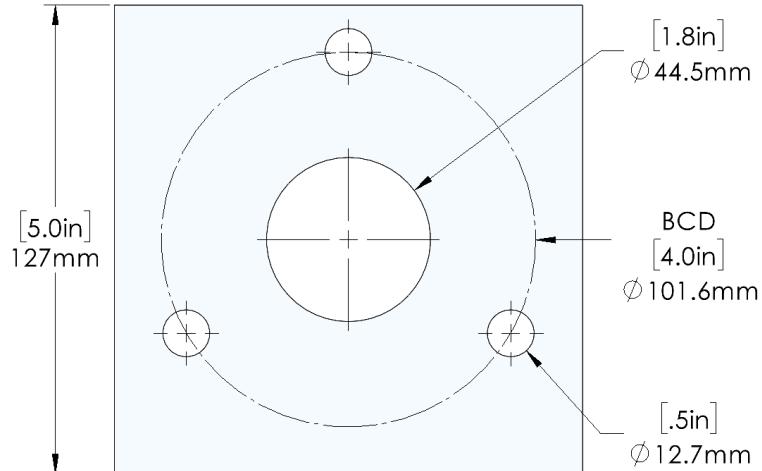



*Image for reference only.*

2. Attach a nut and washer to each anchor bolt.



## INSTALLATION INSTRUCTIONS

3. Release the base by removing the 6 set screws with a 1/8" hex key.
4. Install the base by sliding it over the anchor bolts, ensuring the wiring passes through the middle. Secure the base with washers and nuts, and use the nuts to ensure the base is horizontal.
5. Run the AC wires through the strain relief.
6. Run the line wires through the NM cable connector and secure the 2 screws on the connector.
7. Use a 3 wire closed end connector (must be waterproof and UL approved) to connect the AC wires inside the fixture. Fold and secure the wires around the driver bracket with a cable tie at a minimum distance of 12" above the base.
8. Slide the body of the bollard over the base.
9. Reattach the body by reinstalling the 6 base mounting screws.

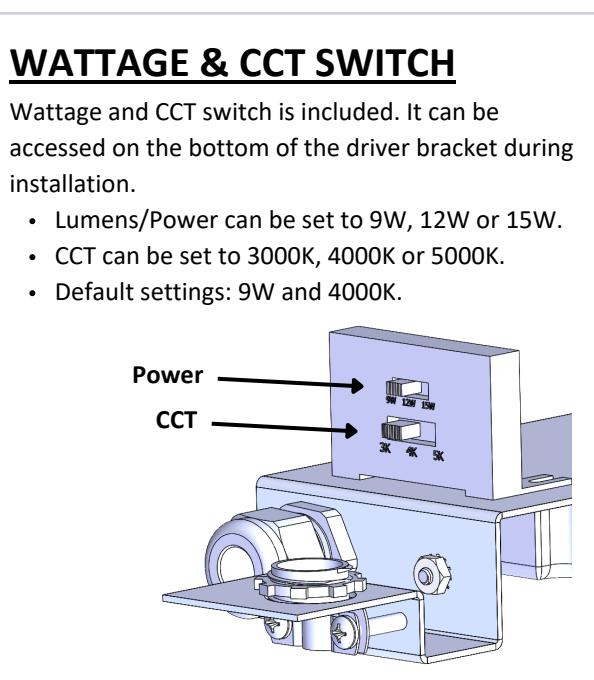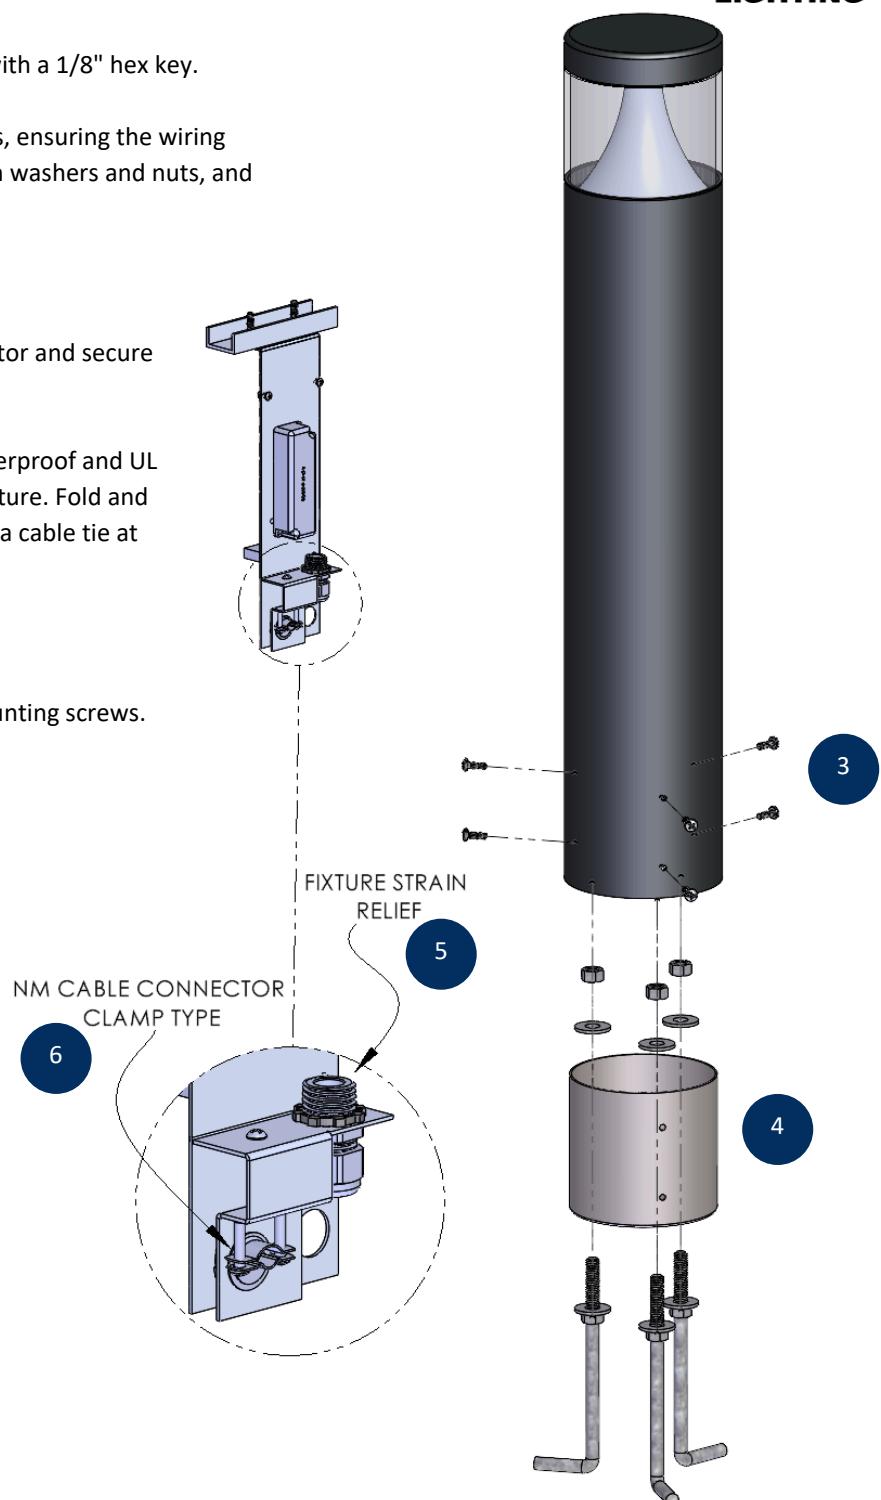

## WIRING

- Check that the line voltage is correct.
- Connect fixture **GROUND** (green) wire to power supply **GROUND** (green) wire.
- Connect fixture **WHITE** wire to power supply **NEUTRAL** wire.
- Connect fixture **BLACK** wire to power supply **LINE** wire
- The fixture includes 0-10V dimming functionality, connect **GREY** or **PINK** and **VIOLET** wires to a 0-10V dimming controller (optional).

