

The DVCS2 is the large size 26W energy efficient LED vaporproof fixture that can be used for industrial and architectural applications. This series of fixtures comprises the DVAKS2-LED which can be ceiling mounted, the DVBKS2-LED which can be wall mounted and the DVCS2-LED which can be pendant mounted.



### APPLICATIONS

**Ideal for industrial and architectural applications such as entrances, stairwells, mandors, outdoor walkways, tunnels and service areas.**

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

### SPECIFICATIONS

#### Construction

Precision die cast aluminum housing with durable chip and fade resistant powder coat finish. Highly efficient heat sink design maintains the junction temperature significantly below the recommended maximum ratings ensuring extended fixture life. Clear polycarbonate lens is standard. Frosted lens available as an option. The fixture is rated IP65 and suitable for outdoor use.

#### Electrical

Total system wattage of the unit is 26W. The standard unit has a high efficiency driver that operates at 120 - 277V.

#### LED Configuration

The DVCS2-LED has an LED array that has a lumen output of minimum 2,860 lumens. The LEDs have a standard color temperature of 5000K, 3000K or 4000K available as options. The LEDs have a CRI of greater than 77 and an operating temperature range of -40°C to +40°C.

#### Finish


Standard finish is Natural aluminum.

#### Accessories

Various Globe and Guard Accessories sold separately. Existing incandescent VAKS / DVAKS series globe and guard will fit new LED fixture.

<b>Watts</b>	<b>26W</b>
<b>Lumens</b>	<b>min. 2,860</b>
<b>Efficacy</b>	<b>min. 110 lumens/watt</b>
<b>Certification</b>	<b>cULus, IP65</b>
<b>LED Life</b>	<b>100,000 hours</b>
<b>Color Temperature</b>	<b>5000K (standard) 4000K (option) 3000K (option)</b>
<b>Warranty</b>	<b>5 Years</b>
<b>Operating temperature</b>	<b>-40°C to +40°C</b>

### DIMENSIONAL DATA

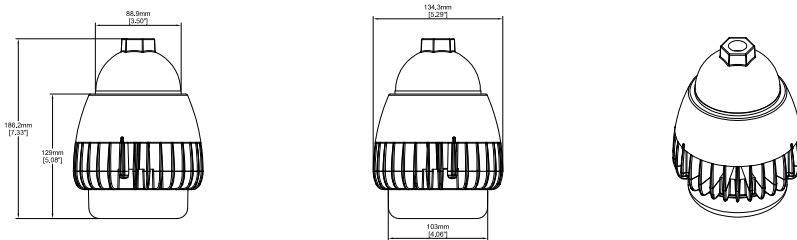

DVCS2-LED  
Pendant mount



OTHER MOUNTING OPTIONS



**DVBKS2-LED**  
Wall mount



**DVAKS2-LED**  
Ceiling mount

AVAILABLE OPTIONS




Red Rouge    Blue Bleu    Green Vert    GLASS / VERRE Amber Jaune    Frosted Givré    Clear Claire    Prismatic Prismatique    POLYCARBONATE White Blanc    GUARD / GRILLE DE PROTECTION

ORDERING GUIDE - FIXTURE

<b>DVCS2</b>	-	<b>LED24</b>	-		-		-	
				<b>VOLTAGE</b>		<b>COLOR TEMP</b>		<b>FINISH</b>
				<b>B - 120 - 277V*</b>		<b>5K - 5000K*</b> <b>4K - 4000K</b> <b>3K - 3000K</b>		<b>NAT - NATURAL ALUMINUM*</b>
								<b>FR - FROSTED LENS*</b>

ORDERING GUIDE - ACCESSORIES



- GL100F FROSTED GLASS**
- GL100 CLEAR GLASS**
- RGL100A (AMBER)**
- RGL100B (BLUE)**
- RGL100G (GREEN)**
- RGL100R (RED)**
- GL100SB ALL SANDBLASTED**
- GD100CGS**

\* Standard configuration