

## INSTALLATION INSTRUCTIONS



**ELECTRICAL SHOCK HAZARD**

**READ, UNDERSTAND, and FOLLOW** these instructions before installing the equipment.

### WARNING

Disconnect the Electrical supply power at the service panel (fuse or circuit breaker box). Failure to do so could result in serious injury or death. Only qualified electricians should install this fixture and the installation MUST conform to the Electrical Code and all local codes and ordinances. Ensure that only proper tools, materials, and equipment are used to complete the installation.

### SAFETY

- Proper grounding is required to ensure personal safety.
- Fixture should be mounted in locations where unauthorized personnel will not readily subject it to tampering.
- Do not use this equipment for anything other than its intended purpose.
- Servicing this equipment should be performed by qualified service personnel.
- Save these instructions.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
- Changes or modifications to this unit not expressly approved by the party responsible for compliance Could void the user authority to operate the equipment.
- **MIN 90 °C SUPPLY CONDUCTOR**

## INSTALLATION


### Tools Required

M8 Allen wrench, Adjustable Wrench, Anchor bolts -3/8-16 x 8"(included in box)

**Note:** Anchor bolts to be installed with at least 1.25"(32mm) thread length above surface level.

### Ground Mount

1. Uninstall the 3 Allen screws at the bottom of the luminaire using an M8 Allen wrench.
2. Rotate the base approximately 15 degrees in counter-clockwise direction and separate the base from the luminaire.
3. Place the base over the pre-installed anchor bolts and pass the cable through the base.
4. Assemble the base to the concrete anchor using the spring washers and nuts provided.
5. Connect the luminaire to supply line using the cable connector provided as shown in the wiring diagram.
6. Place the Luminaire on the base and rotate 15° clockwise.
7. Install the 3 Allen screws using the Allen wrench to re-attach the base to the luminaire.

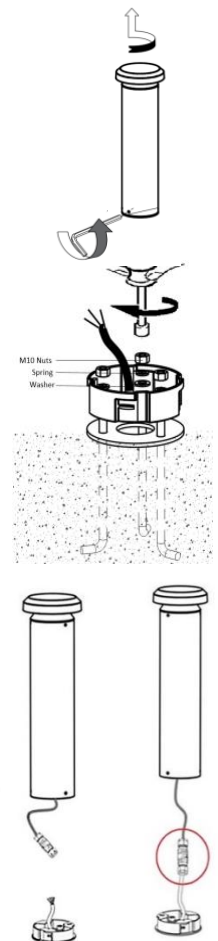

## SMT6-LED

### INSTALLATION INSTRUCTIONS

#### WIRING

- Check that the line voltage is correct.
- Connect fixture **GROUND** (green) wire to power supply **GROUND** (green) wire.
- Connect fixture **WHITE** wire to power supply **NEUTRAL** wire.
- Connect fixture **BLACK** wire to power supply **LINE** wire
- The fixture includes 0-10V dimming functionality, connect **RED** and **ORANGE** wires to a 0-10V dimming controller (optional).

