

The FW4-LED60 is a 4' linear vaporproof LED fixture. Ruggedly designed with 0-10V dimming. The fixture offers a minimum savings of 30% - 40% over traditional fixtures.



APPLICATIONS

Ideal for a variety of indoor and outdoor environments such as underground parking garages, industrial facilities, commercial freezers, and poultry barns.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Housing

Polycarbonate, UV stabilized. Conduit entries at either end.

Lens

Polycarbonate, UV stabilized, and is retained to the housing with five clips on each side. Clear lens available as an option.

Reflector

Flat aluminum reflector system with a white powder coat paint finish. LED boards are secured to the reflector using a clip and lock system.

Electrical

Each unit has four high efficiency LED boards and high efficiency drivers that operate at 120V - 277V up to 100,000 hours..

Dimming

0-10V dimming is standard.

Mounting

Standard unit comes with surface mount configuration. The fixture can also be pendant mounted. Fixture has stainless steel mounting brackets.

Wiring

The unit can be wired using quick connect disconnects.

Exceptions

Not for use in car wash facilities.


Options

- Stainless steel mounting clips
- High frequency Motion Sensor
- Clear lens

Equivalent to	2 lamp T5HO
Input Watts	63W
Lumens	min. 7950
Efficiency	min. 126 lumens per watt

Operating Temperature	-40°C to +40°C
Certification	cULus, DLC, IP65
Warranty	5 Years
Color Temperature	4000K (standard) 3000K, 5000K (options)
Total Harmonic Distortion	<10
Power Factor	0.996
CRI	>80

DIMENSIONS

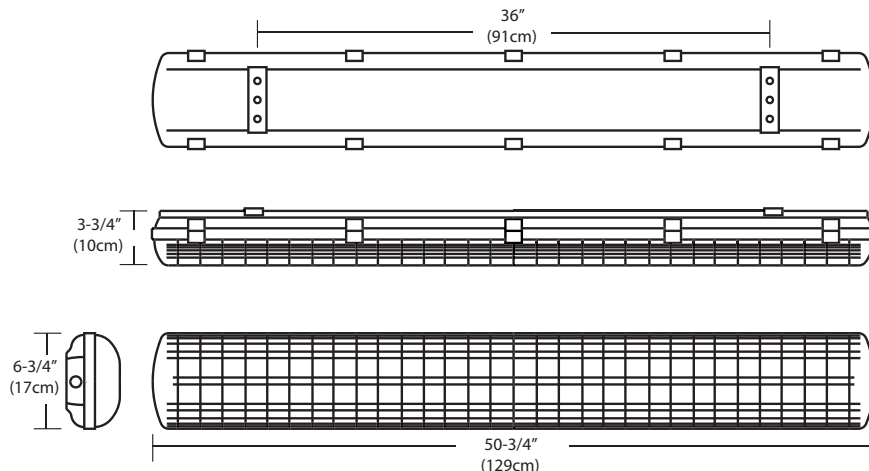

ACCESSORIES



High Frequency Motion Sensor
Optional - order separately



Stainless Steel Clips (SS)
Optional - order separately

The High Frequency Motion Sensor uses high frequency waves to detect motion. The sensor sends out waves that bounce off nearby surfaces and return to the sensor. Motion changes the speed of the waves returning to the sensor. The sensor detects the change in speed and interprets it as occupancy which causes the light to turn on. It triggers primarily through movement of people, objects, machinery. The band of frequency that it usually operates in is <10 mW (about 10x lower than mobile phones)

ORDERING GUIDE

FW4	-	LED60	-	-	-	-
			VOLTAGE	COLOR TEMP	OPTIONS	
			B - 120-277V*	4000K* 3000K 5000K	DIM - 0-10V Dimming SHFS - Standard On/Off high frequency motion sensor DHFS - Dimming High frequency motion sensor SSC - Stainless steel clips	

Order separately : REPL FW4 LENS CLIPS SST (Stainless steel clips)
MS-HF - Integrated High Frequency Sensor