



# LFX4W-LED150

Linear Wide Body Vaporproof Fixture



## SPECIFICATIONS\*

Watts	152
Lumens	22807
Efficacy	151
Replaces Up To	8 Lamp T5HO/ 400WW MH
Color Temp	4000K*, 5000K
Certification	cULus, IP66, DLC
Operating Temp	-40°C to +40°C
Voltage	120-277, 480
LED Life	100,000 Hours
Housing	Polycarbonate
Lens	Polycarbonate
Dimmable	0-10V Dimming
Total Harmonic Distortion	12.81
Power Factor	0.93
Mounting Options	Surface Mount, suspension mount

\*Standard




## DESCRIPTION

The LFX4W is a ruggedly designed, wide body vaporproof fixture with easy installation features ideal for food processing units, agricultural applications, industrial facilities, and commercial kitchens.

## APPLICATIONS



Agricultural



Food  
Processing  
Industries




Poultry Barns


## FEATURES

- UV stabilized polycarbonate housing and frosted polycarbonate lens for use in rugged environments
- Fixture has adjustable stainless steel mounting brackets and 16 stainless steel clips
- NSF is standard.
- High frequency sensor and battery back up are optional.
- Driver has built in 4kV surge protection.
- Not for use in car washes.

## DIMENSIONS

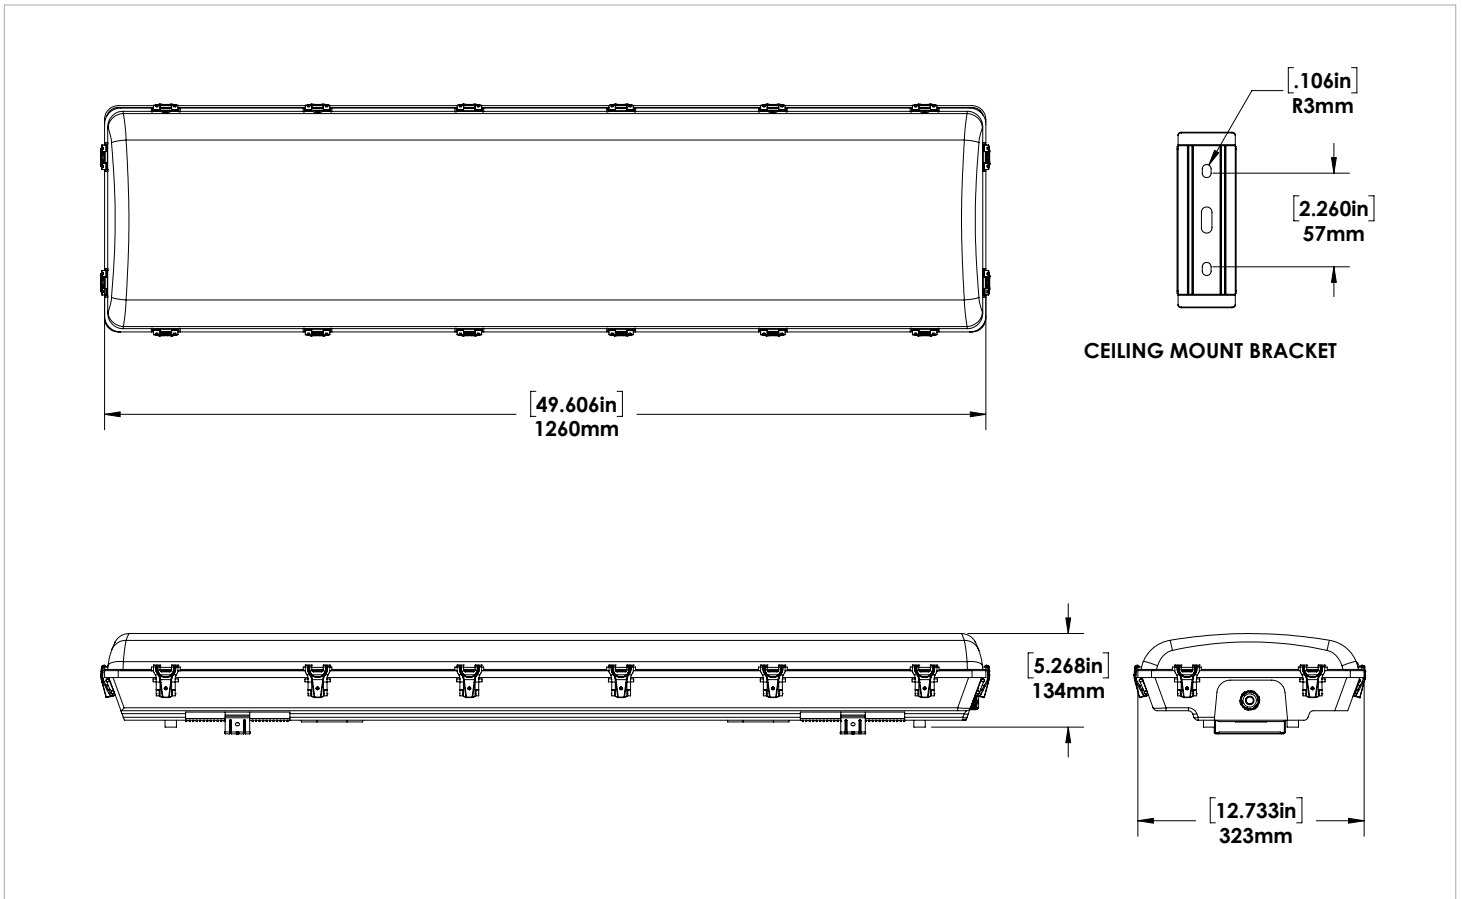


## EASY INSTALLATION

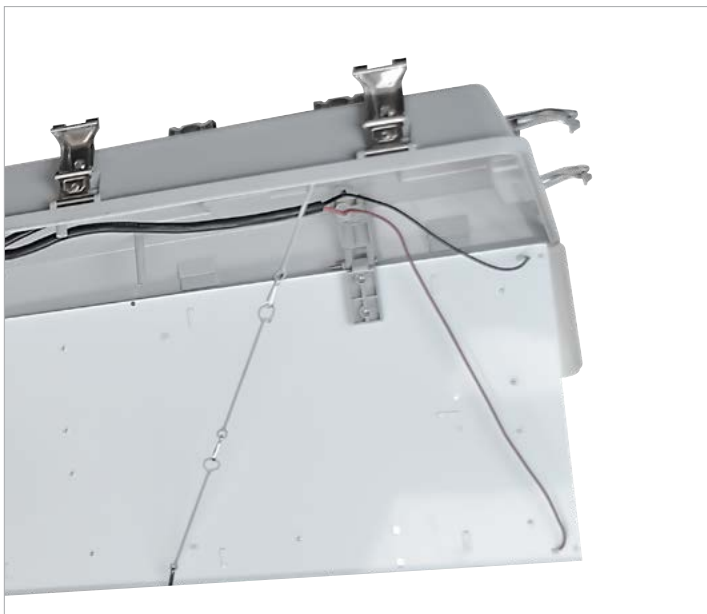

**LED tray tethered and hinged to the fixture.**

**PHOTOMETRICS**

**LFX4W-LED150-B-4K-GRY-DIM  
MOUNTED AT 20 PI**

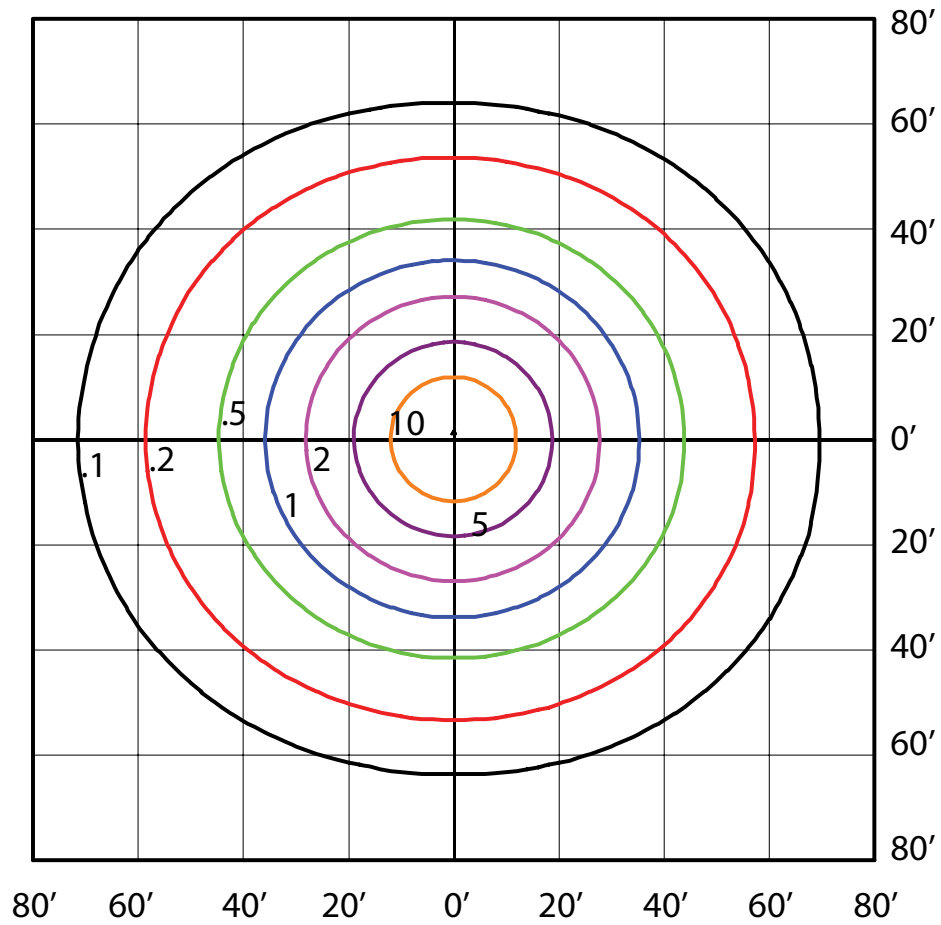

## OTHER MODEL SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT(K)	CRI
LFX4W-LED150-B-4K-XXX-DIM	120-277V	151.7	22807	150.64	12.63	0.9299	4210	86
LFX4W-LED150-B-5K-XXX-DIM	120-277V	151.7	23322	153.74	12.81	0.9293	5146	85.6
LFX4W-LED150-L-4K-XXX-DIM	480V	156.1	23095	147.95	12.49	0.968	4176	85.8
LFX4W-LED150-L-5K-XXX-DIM	480V	157	23448	149.35	12.65	0.9663	5101	84.5

### LEGEND

B - 120V-277V, L - 480V

4K - 4000K, 5K - 5000K

XXX - HOUSING FINISH

## ORDERING GUIDE

LFX4W	LED150						
WATTS	VOLTAGE	COLOR TEMP.	FINISH	DRIVER	NSF	DRIVER	
	B - 120-277V*	4K - 4000K*	GRY - GREY*	DIM - 0-10V Dimming*	FS - NSF Rating*	DHFS - Dimming high frequency motion sensor	
	L - 480V	5K - 5000K					BBK - Battery back up

\*Standard Configuration

4' aircraft cable for suspended mounting included with fixture.