



# ORA1-LED15

LED Wall/Flood Light



## SPECIFICATIONS\*

Watts	16W
Lumens	1510
Efficacy	97 lm/W
Replaces Up To	70W MH 300W Quartz
Color Temp	4,000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 480V in wall mount coming soon
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	18.41
Power Factor	0.912
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



## DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

## APPLICATIONS



Town Houses



Condos



Perimeter Lighting



Shopping Malls

## FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.


\*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 2.

**NOTE:** Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).


**DIMENSIONS**




**Wall Mount**

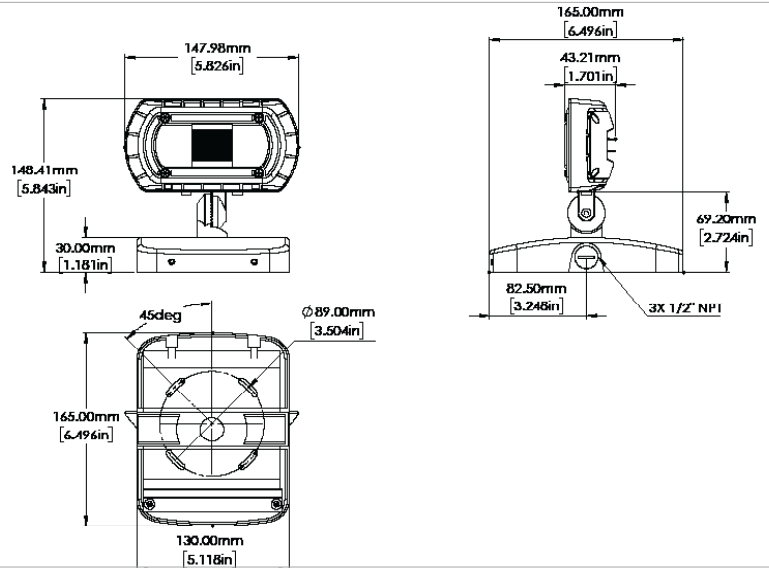

**Yoke Mount**

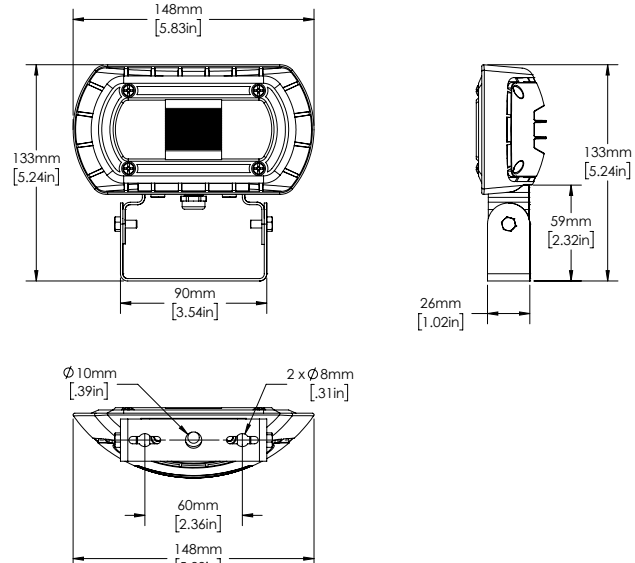

**Knuckle Mount**

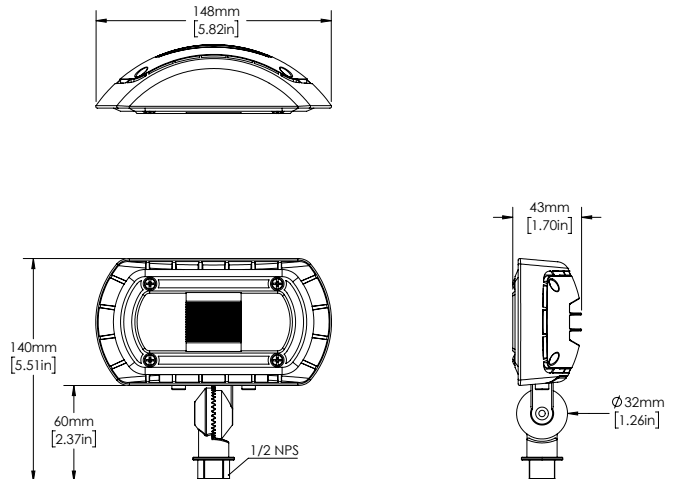

## SPECIFICATIONS


MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF
ORA1-LED15-B-4K-XXX-XX	120-277	15.64	1509.9	97.15	18.41	0.912

DLC listed as Outdoor Full-Cutoff Wall-Mounted Area Luminaire and as Architectural Flood and Spot Luminaires

Legend  
 B - 120-277V  
 4K - 4000K  
 XXX - Finish  
 XX - Mounting


## PHOTOMETRICS

### ORA1-LED15 4K MOUNTED AT 8 FEET - WALL MOUNT ORIENTATION

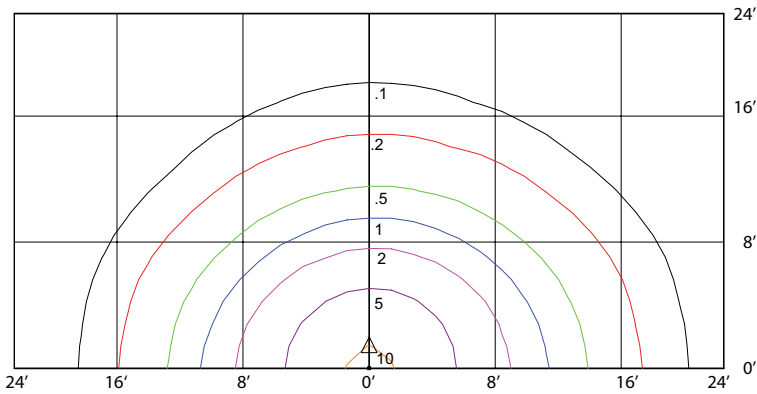


## ARCHITECTURAL WALL MOUNT

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

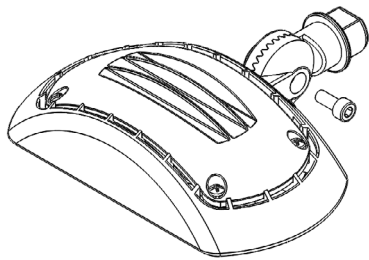

### Step One

Remove screw from knuckle mount

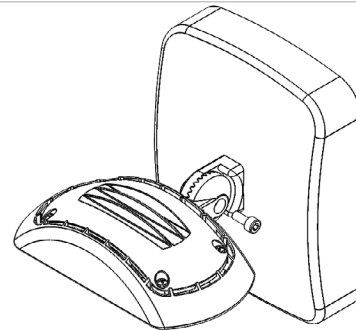

### Step Two

Mount on bracket with wiring and tighten screw

## ORDERING GUIDE

<b>ORA1</b>					
WATTS	VOLTAGE	COLOR TEMP.	FINISH	MOUNTING	
LED15	B - 120 - 277V*	4K - 4000K*	BRZ - BRONZE*	KN-Knuckle	YK - Yoke
				WMC - Wall Mount with 3 conduit entries	

\* Standard configuration

## FIELD INSTALLED ACCESSORIES

### CHECK THE ACCESSORIES YOU WISH TO ORDER:

ORA1/2 WALL MOUNT with 3 Conduit Entries Bronze

ORA1/2 Architectural Wall Mount Bracket without  
conduit entries Bronze