



ORA2-LED30

LED WALL / FLOOD LIGHT



SPECIFICATIONS*

Watts	30W
Lumens	3359
Efficacy	112 lm/W
Replaces Up To	100W MH 500W Quartz
Color Temp	4,000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 480V in wall mount
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	18.57%
Power Factor	0.9817
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

APPLICATIONS



Town Houses



Condos



Perimeter Lighting



Shopping Malls




FEATURES

- Elegant, sleek design with a modern look
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.

*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 4.


NOTE: Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.

DIMENSIONS

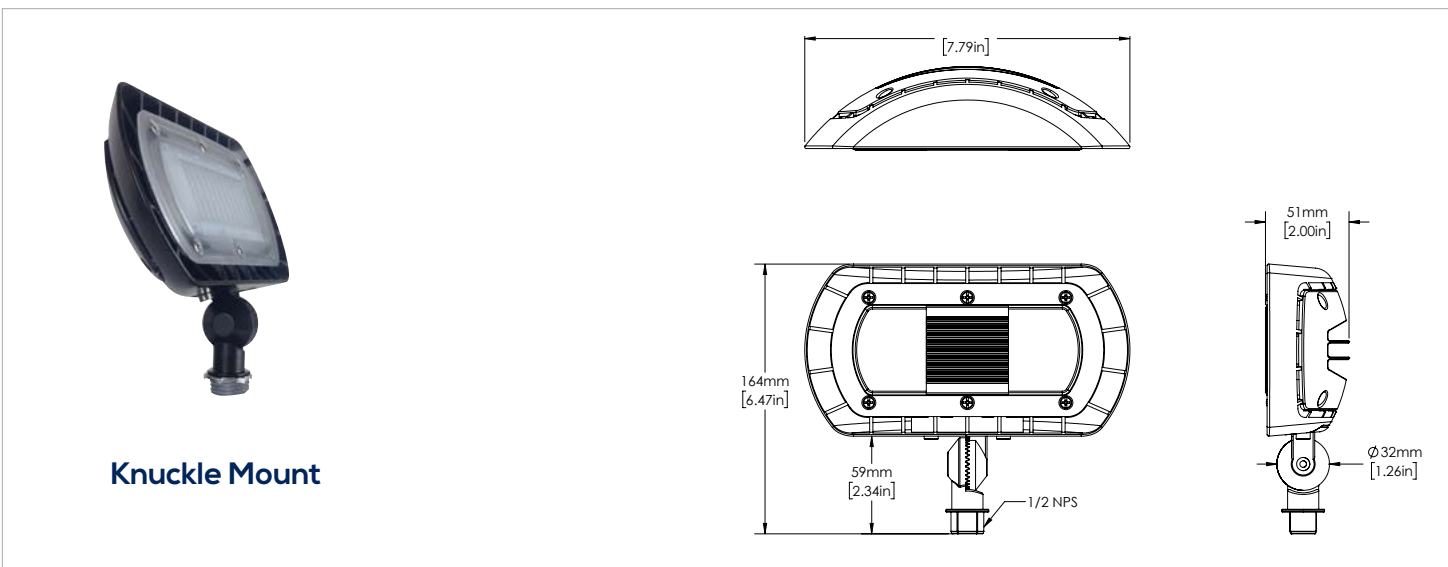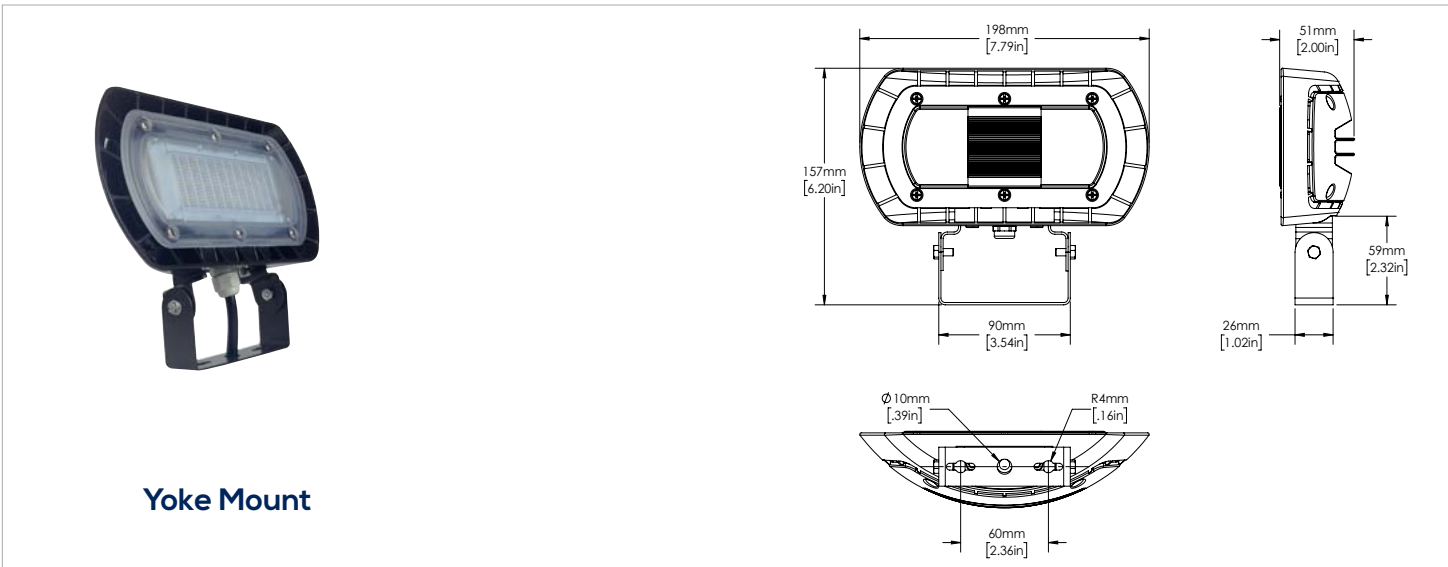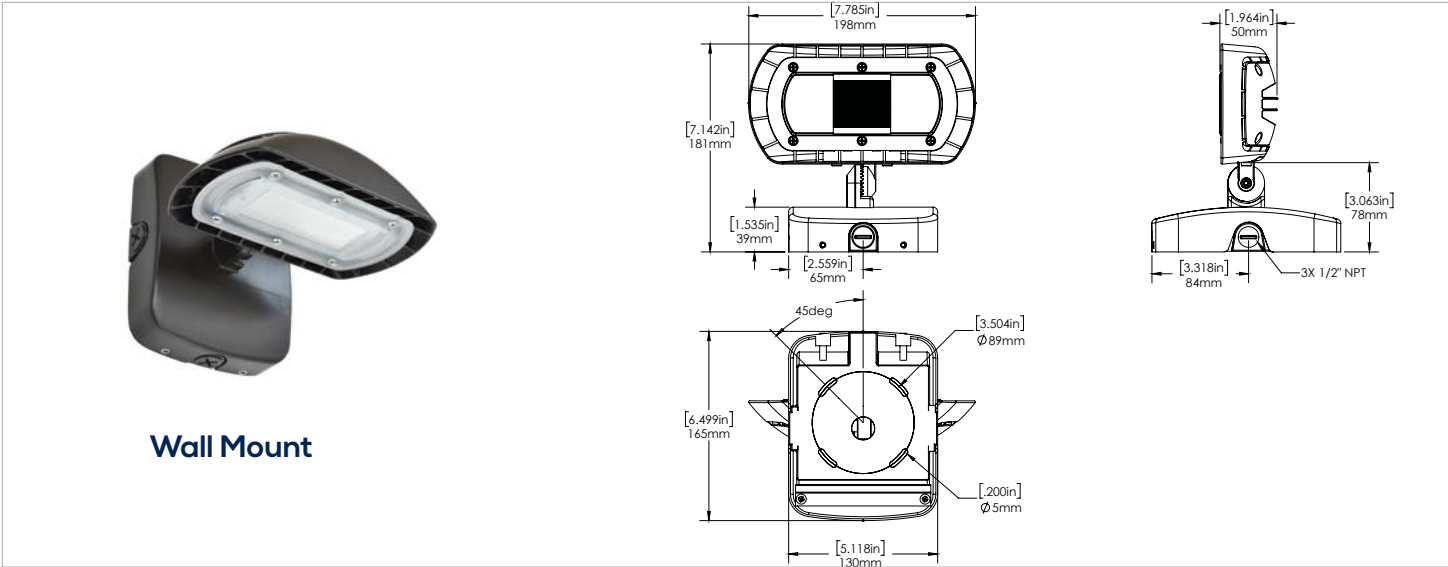


PHOTOMETRICS

ORA2-LED30 4K MOUNTED AT 12 FEET - WALL MOUNT ORIENTATION

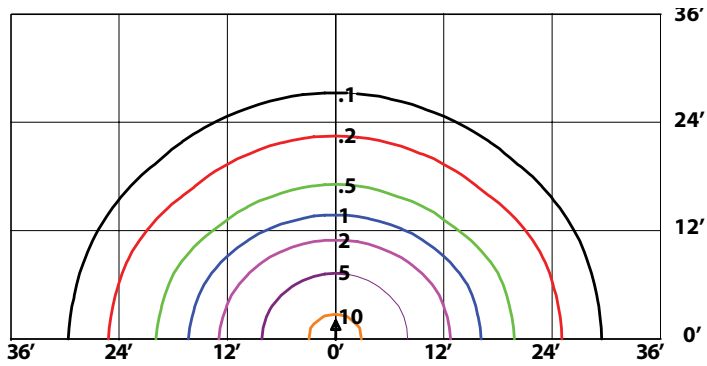


ARCHITECTURAL WALL MOUNT

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

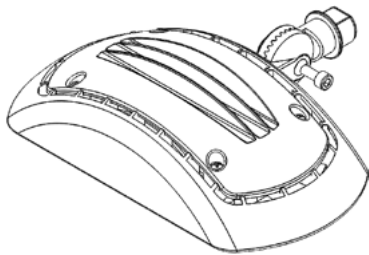

Step One


Remove screw from knuckle mount

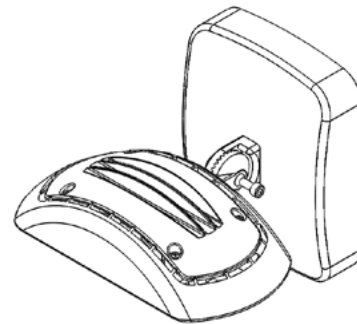

Step Two

Mount on bracket with wiring and tighten screw

480V WALL MOUNT

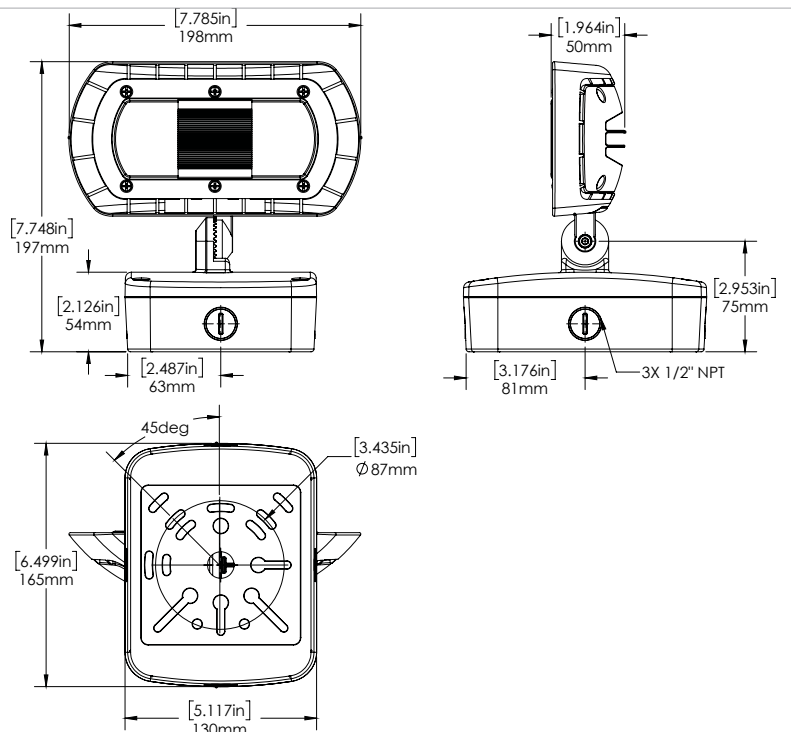

SPECIFICATIONS

SPECIFICATIONS	VOLTAGE(V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD (%)	PF
ORA2-LED30-B-4K-XXX-XX	120-277	30.08	3358.6	111.66	18.57	0.9817
ORA2-LED30-L-4K-XXX-XX	480	34.37	3613	105.12	13.16	0.9545

DLC listed as Outdoor Full-Cutoff Wall-Mounted Area Luminaire and as Architectural Flood and Spot Luminaires

Legend

B - 120-277V, L-480V

4K - 4000K

XXX- Finish

XX- Mounting

ORDERING GUIDE

ORA2					
WATTS	VOLTAGE	COLOR TEMP.	FINISH	MOUNTING	
LED30	B - 120 - 277V* L-480V (Wall Mount Only)	4K - 4000K*	BRZ - BRONZE*	KN-Knuckle YK - Yoke WMC - Wall Mount with 3 conduit entries WMCB - Wall mount for 480V	

* Standard configuration

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

ORA1/2 WALL MOUNT with 3 Conduit Entries Bronze

ORA1/2 Architectural Wall Mount Bracket without
conduit entries Bronze