

The WLS-LED20 is an energy efficient wall light with a similar light output to a 70W High Pressure Sodium/ 50W Metal Halide fixture.



APPLICATIONS

Ideal for a variety of outdoor applications such as parking areas, entrances, back doors, walkways and recreational areas.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

High quality cast aluminum back plate. Durable chip and fade resistant powder coat paint finish. Fixture has one conduit entry at the bottom.

LED Configuration

The fixture contains the newest generation of LED chips that deliver a total lumen output of 2160 lumens at an efficiency of 107 lumens/watt. LED color temperature is 5000K.

Photocell

Is included for dusk-to-dawn operation.

Lens

Polycarbonate, frosted lens provides even light distribution.

Electrical

Total system wattage of the unit is 20W. The standard unit has a high efficiency driver that operates at 120-277V.


Finish

Standard finish is Bronze.


Fixture Watts	20W
Lumens	2160
Efficacy	107 lumens/watt
Replaces	70W HPS 50W MH

LED Life	100,000 hours
Color Temperature	5000K (standard)
Warranty	5 Years
Operating temperature	-40°C to +40°C
CRI	>80
Total Harmonic Distortion	14.52%
Power Factor	0.9

DIMENSIONS

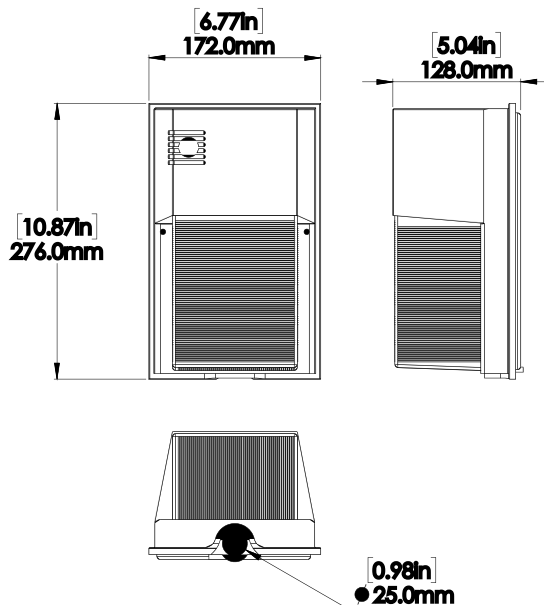

ACCESSORIES

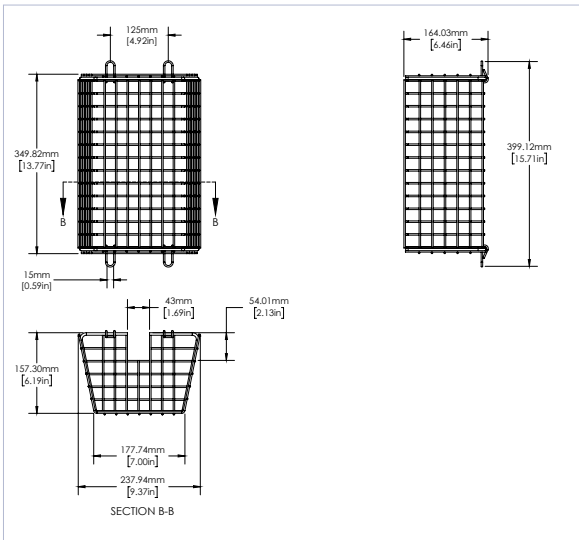


Wire Cage (order Separately)

ORDERING GUIDE

WLS	-	LED20	-	B	-	5K	-	BRZ	-	PC	-	FR
		VOLTAGE			COLOR TEMP			FINISH			PHOTOCELL	LENS
		B - 120-277V*			5K - 5000K*			BRZ - BRONZE*			PC - PHOTOCELL*	FR - FROSTED LENS*

* Standard configuration

ACCESSORIES ORDERING GUIDE



OPTIONS

WC - WIRE CAGE