



# AL2-LED

## Area Light LED



### IDEAL APPLICATIONS

- Roadways
- Parking Lots
- Perimeter Lighting

### DESCRIPTION:

The AL-LED fixtures are high efficiency area lights with multiple beam patterns to suit a variety of applications. Intelligently designed, series of fixture provides superior lighting performance and significant energy savings over traditional fixtures

### FEATURES:

#### Construction

- Precision die cast aluminum housing with clear polycarbonate lens. The fixture offers superior heat sinking with air-flow fins on the top.

#### Optics

- Unit has high efficiency injection molded optics that have an efficacy of 120lm/W. The LEDs have a color temperature option of 3000K, 4000K, 5000K. The CRI is greater than 70 and the operating temperature range is 40°C - to +40°C.

#### Beam Distribution

- Available in T2, T3, T4 and T5 beam patterns for a wide range of applications.

#### Mounting

- The AL series can be arm mounted for round or square poles. Wall bracket and slipfitter mount is also available. Mounting options sold separately.

#### Electrical

- The standard unit has a high efficiency driver that operates at 120 - 277V. 480V also available. 10kV Surge protector included in all fixtures

#### Finish

- Standard finish is Bronze. Please consult factory for custom color.

#### Options


- Factory installed photocell option available.

SPECIFICATIONS	AL2-LED150	AL2-LED200	AL2-LED250
Watts	146.8W	192.1W	238.1W
Lumens	18886 lm	23353 lm	27227 lm
Efficacy	128.63lm/W	121.53lm/W	114.35 lm/W
Voltage	120-277V, 480V		
Color Temp	3000K, 4000K, 5000K		
CRI	71.5	71.7	72
Dimming	0-10V Dimming (5%-100%)		
THD	5.34%	5.29%	5.53%
PF	0.99	0.94	0.99
Beam Distribution	T2,T3,T4,T5		
LED Life (L80)	>72,000 hours		
Surge Protector	4kV (driver surge protection) and 10kV additional surge suppression		
Housing Finish	Bronze, Custom Colors		
Housing Details	Die Cast Aluminum		
Mounting (Sold Separately)	Slip Fitter, Wall mount Bracket, Arm for Round pole, Arm for Square pole		
Operating Temp.	-40°C to +40°C (-40°F to 104°F)		
Factory Installed Options	Photocontrol		
Certification	UL, 5 Year Warranty, Wet Locations, DLC		

Specs Shown are for 5000K, 120V  
Note: 3000K is not DLC listed



## DIMENSIONS:

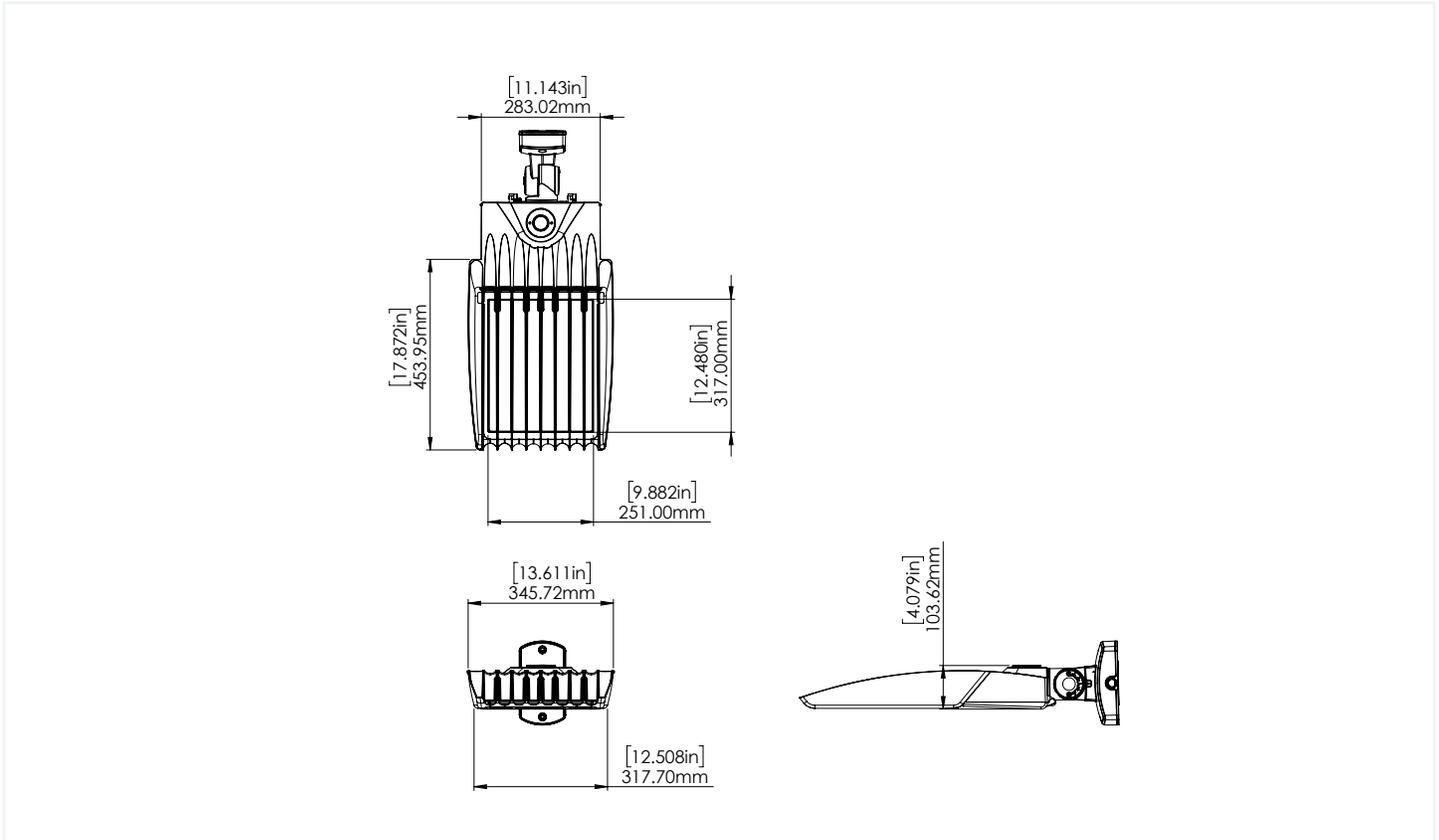

### AMPERAGE DRAW & SURGE PROTECTION

	Watts	CURRENT (A)					INTERNAL SURGE PROTECTION (kV)	
		120V	208V	240V	277V	480V	120-277V	480V
AL2-LED150	146.8	1.285	0.741	0.642	0.556	0.321	10kV	10kV
AL2-LED200	192.1	1.681	0.970	0.840	0.728	0.420	10kV	10kV
AL2-LED240	238.1	2.083	1.202	1.042	0.903	0.521	10kV	10kV


### TM-21 ESTIMATED LUMEN MAINTENANCE

	50,000 Hours	75,000 Hours	100,000 Hours
AL2-LED	87.8%	83.0%	78.5%

## MOUNTING OPTIONS:




**Slipfit Mount**  
Optional - order separately

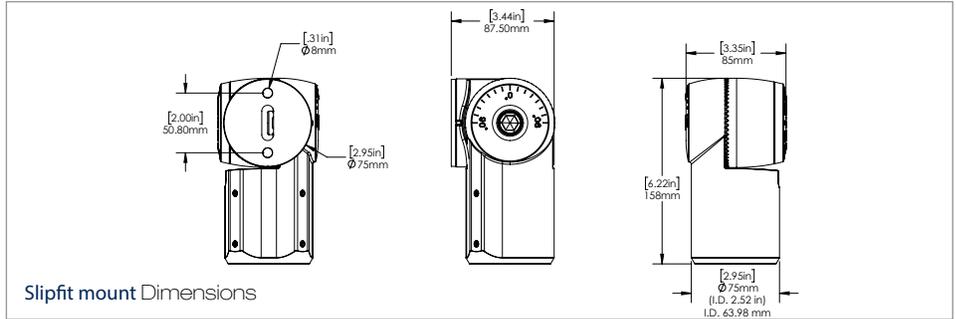

**Slipfit mount Dimensions**




**Arm for square pole**  
Optional - order separately

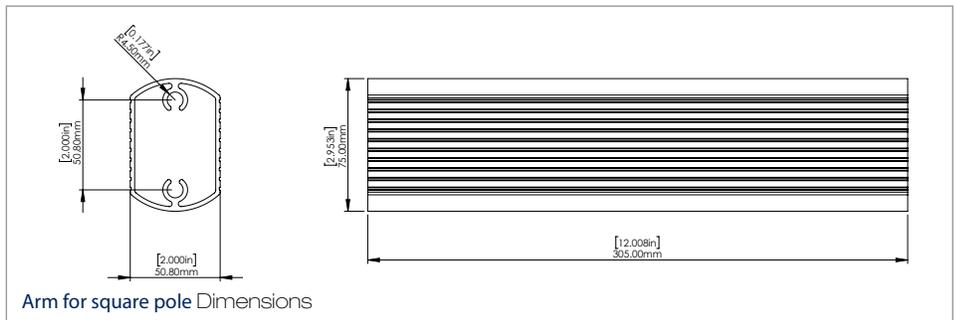

**Arm for square pole Dimensions**




**Wall Mount Bracket**  
Optional - order separately

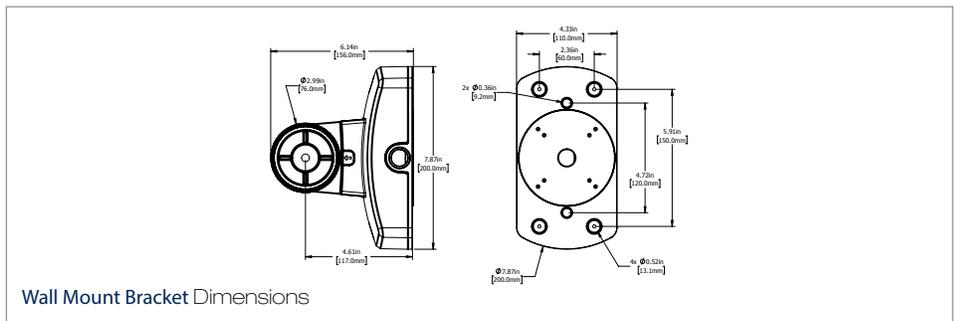

**Wall Mount Bracket Dimensions**



**Arm for round pole**  
Optional - order separately

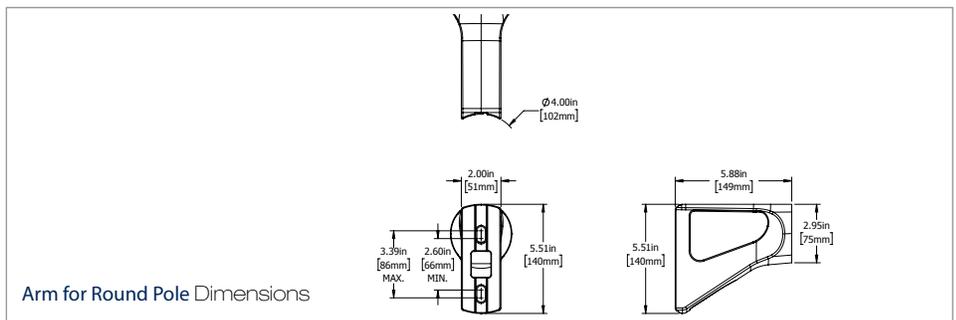

**Arm for Round Pole Dimensions**

## ORDERING GUIDE:

AL2		DIM					
Fixture	Wattage	Voltage	Color Temp.	Beam	Finish	Dimming	Options
	LED150	B - 120-277V*	5K - 5000K*	T2 - Type 2	BRZ - Bronze*	DIM - 0-10V Dimming	PC - Photocell
	LED200	L - 480V	4K - 4000K	T3 - Type 3	CC - Custom Color		
	LED250		3K - 3000K	T4 - Type 4			
				T5 - Type 5			

\* Standard configuration

\*\* All mounting configurations sold separately