



ORA3-LED50

LED WALL / FLOOD LIGHT



SPECIFICATIONS*

Watts	50W
Lumens	5470
Efficacy	111 lm/W
Replaces Up To	150W MH 1500W Quartz
Color Temp	3000K, 4000K*, 5000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 480V in wall mount
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	19.78%
Power Factor	0.9788
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

APPLICATIONS



Town Houses



Condos



Perimeter
Lighting



Shopping Malls

FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.


*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 4.

NOTE: Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.


DIMENSIONS




Wall Mount

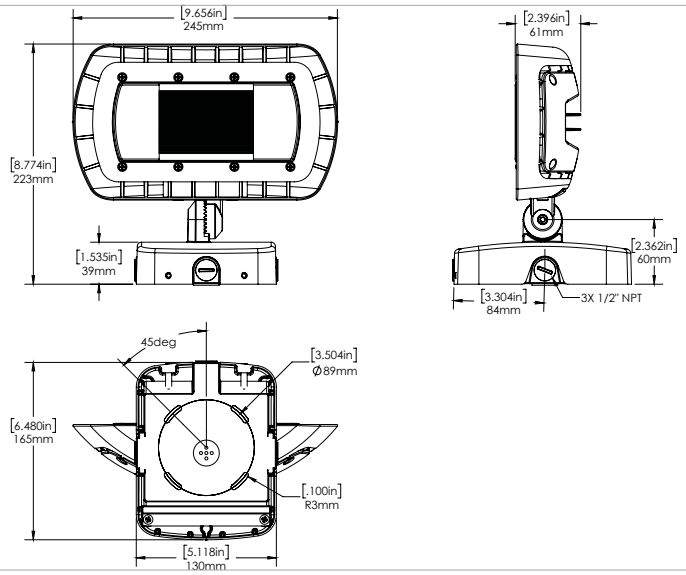

Yoke Mount

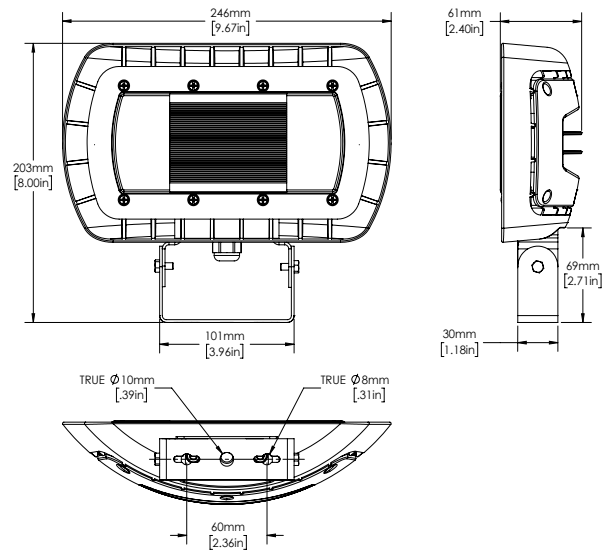


Knuckle Mount

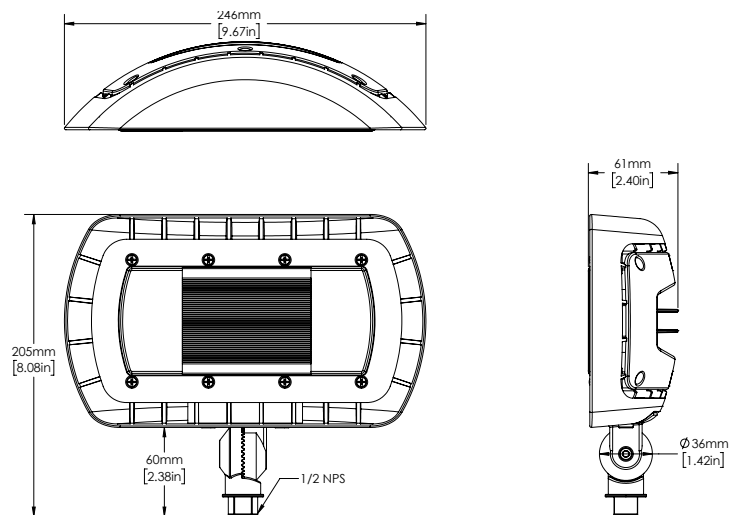


PHOTOMETRICS

ORA3-LED50 4K MOUNTED AT 15 FEET - WALL MOUNT ORIENTATION

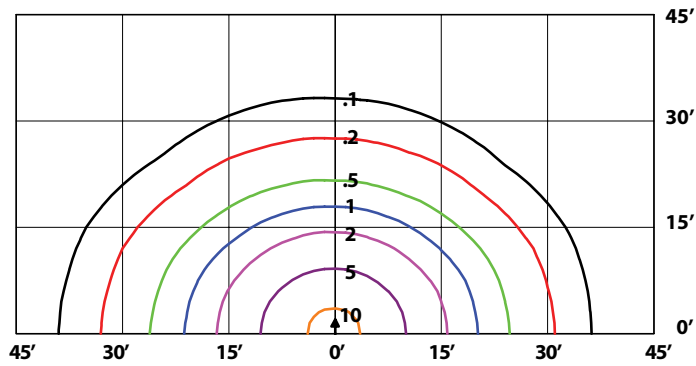


ARCHITECTURAL WALL MOUNT

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

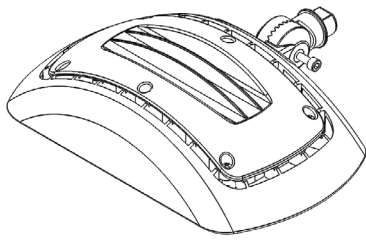

Step One


Remove screw from knuckle mount

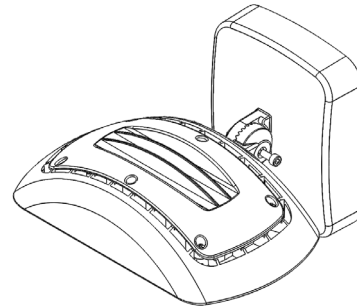

Step Two

Mount on bracket with wiring and tighten screw

480V WALL MOUNT

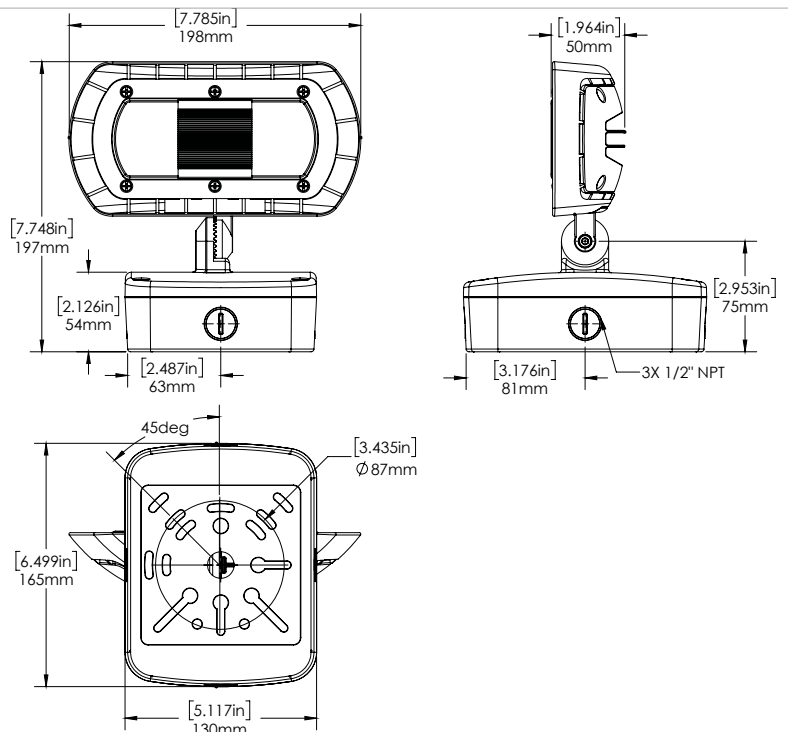

SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT (LM)	EFFICACY (Lm/W)	THD	PF	CCT (K)	(CRI)
ORA3-LED50-B-3K-XXX-XX	120-277	49	5286	107.4	19.6	0.918	3000	72.9
ORA3-LED50-B-4K-XXX-XX	120-277	49	5405	110.1	19.8	0.917	4000	70.0
ORA3-LED50-B-5K-XXX-XX	120-277	49	5492	112.8	19.8	0.915	5000	70.0
ORA3-LED50-L-3K-XXX-XX	480	52	5515	105.7	14.4	0.955	3000	72.5
ORA3-LED50-L-4K-XXX-XX	480	53	5796	108.8	14.5	0.954	4000	73.1
ORA3-LED50-L-5K-XXX-XX	480	54	5887	109.1	14.9	0.954	5000	73.3

DLC listed as Outdoor Full-Cutoff Wall-Mounted Area Luminaire and as Architectural Flood and Spot Luminaires

Legend


B - 120-277V, L-480V

4K - 4000K

XXX- Finish

XX- Mounting

ORDERING GUIDE

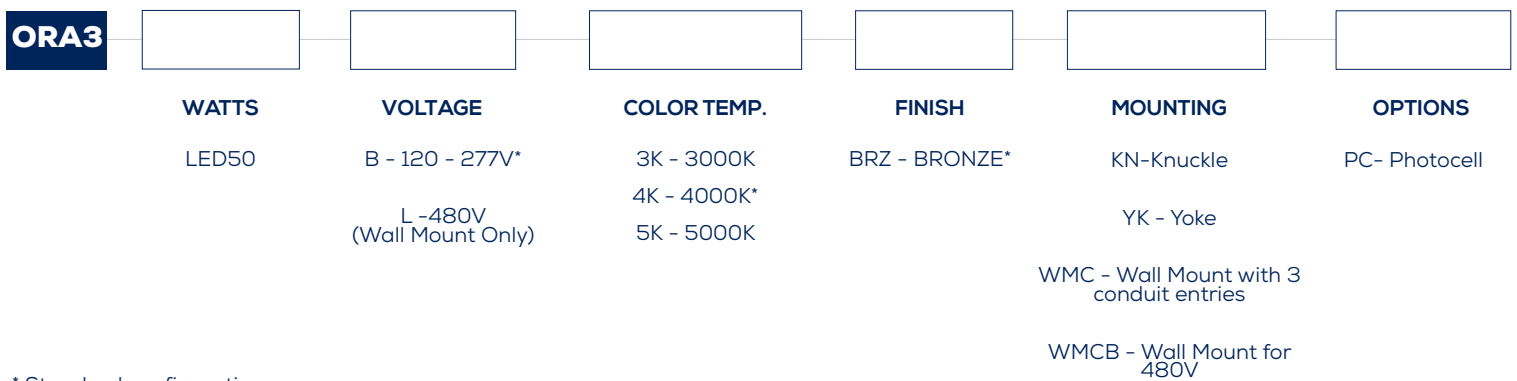

* Standard configuration

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

Wall mount with 3 Conduit Entries Bronze

Architectural Wall Mount Bracket without conduit entries
Bronze