



ORA4-LED80

LED WALL / FLOOD LIGHT



SPECIFICATIONS*

Watts	78W
Lumens	8827
Efficacy	113 lm/W
Replaces Up To	250W MH
Color Temp	3000K, 4000K*, 5000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 480V in wall mount
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	20.36%
Power Factor	0.9743
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

APPLICATIONS



Town Houses



Condos



Perimeter Lighting



Shopping Malls

FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.


*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 4.

NOTE: Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.


DIMENSIONS




Wall Mount

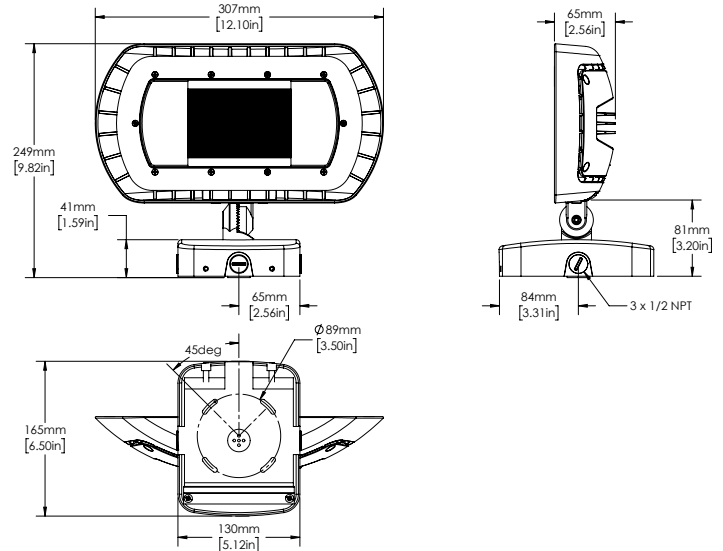

Yoke Mount

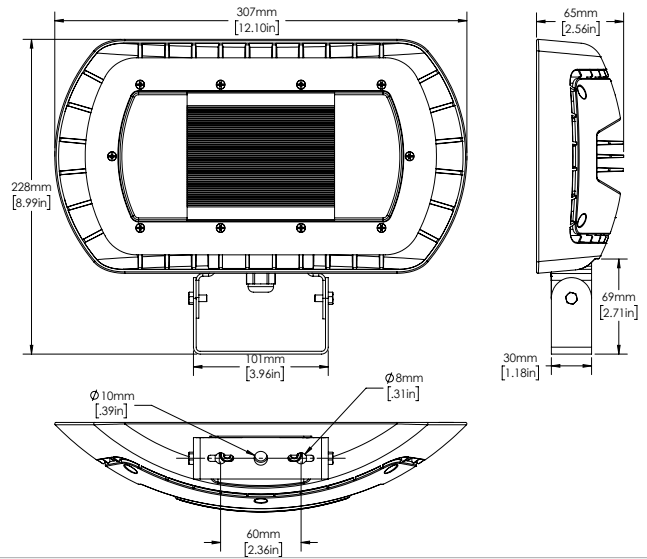


Knuckle Mount

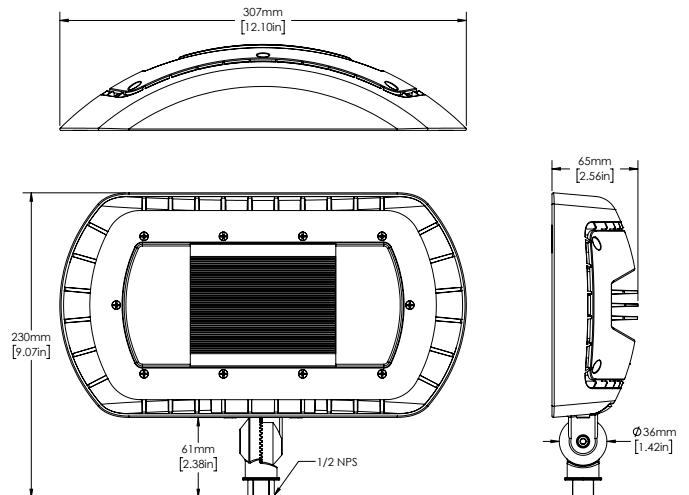


PHOTOMETRICS

ORA4-LED80 4K MOUNTED AT 20 FEET - WALL MOUNT ORIENTATION

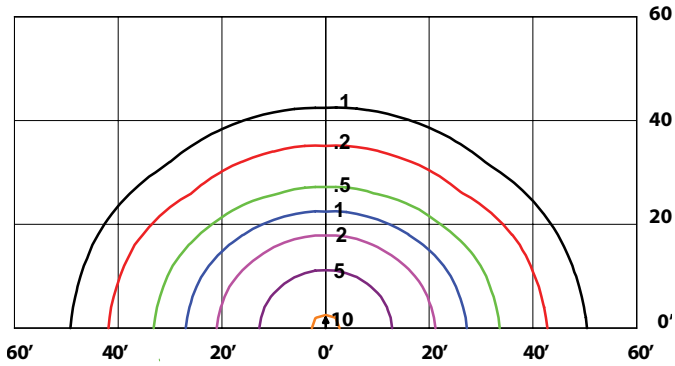


ARCHITECTURAL WALL MOUNT

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

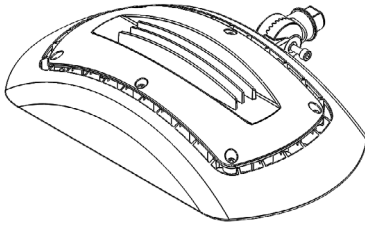


Step One
Remove screw from knuckle mount

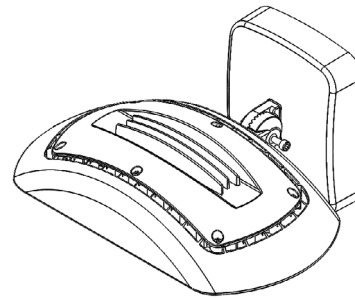

Step Two
Mount on bracket with wiring and tighten screw

480V WALL MOUNT

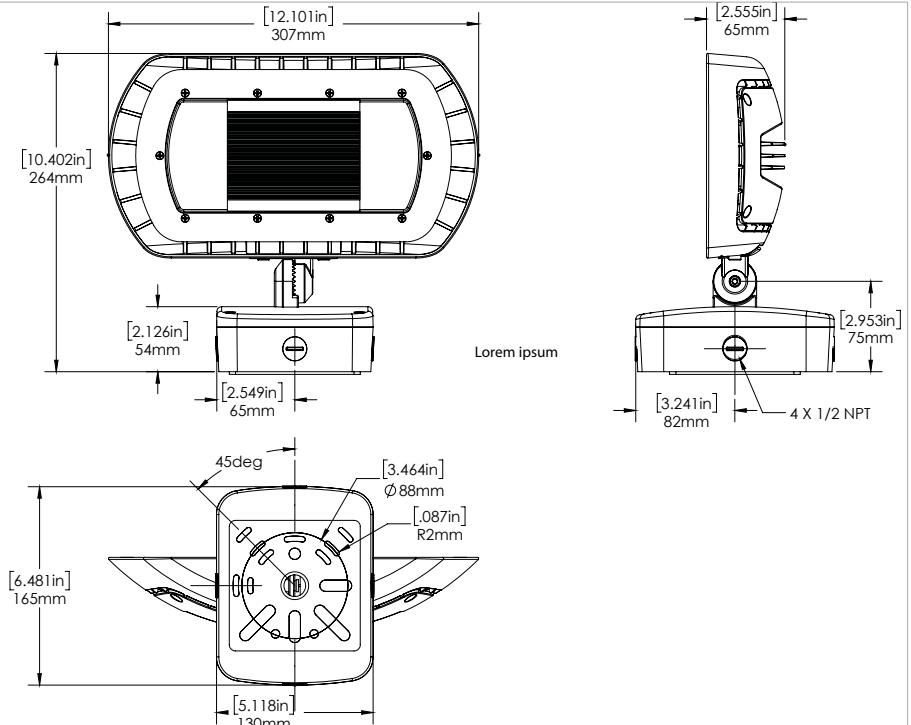

SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT (LM)	EFFICACY (Lm/W)	THD	PF	CCT (K)	(CRI)
ORA4-LED80-B-3K-XXX-XX	120-277	79	8623	109.9	20.2	0.922	3000	72.9
ORA4-LED80-B-4K-XXX-XX	120-277	78	8694	111.8	20.4	0.921	4000	70.0
ORA4-LED80-B-5K-XXX-XX	120-277	78	8848	113.6	20.4	0.921	5000	70.0
ORA4-LED80-L-3K-XXX-XX	480	85	8792	103.1	18.3	0.951	3000	72.5
ORA4-LED80-L-4K-XXX-XX	480	83	8647	103.9	18.4	0.950	4000	72.5
ORA4-LED80-L-5K-XXX-XX	480	84	8734	104.2	18.2	0.951	5000	72.8

DLC listed as Outdoor Full-Cutoff Wall-Mounted Area Luminaire and as Architectural Flood and Spot Luminaires

Legend

B - 120-277V, L-480V

4K - 4000K

XXX- Finish

XX- Mounting

ORDERING GUIDE

ORA4	WATTS	VOLTAGE	COLOR TEMP.	FINISH	MOUNTING	OPTIONS
	LED80	B - 120 - 277V* L -480V (Wall Mount only)	3K - 3000K 4K - 4000K* 5K - 5000K	BRZ - BRONZE*	KN-Knuckle YK - Yoke WMC -Wall Mount with 3 conduit entries WMCB - Wall mount for 480V	PC - Photocell

* Standard configuration

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

Wall mount with 3 Conduit Entries Bronze

Architectural Wall Mount Bracket without conduit entries
Bronze