

The VCS and LG Series of fixtures are elegantly designed, gooseneck fixtures that provide bright, even illumination for signs.



Project	
Type	
Date	
Notes	

APPLICATIONS

Ideal for sign and accent lighting in retail and commercial applications.

SPECIFICATIONS

Construction

Domes, arms and mounting plate are made of aluminum with a durable powder coat paint finish. Various combinations of fixtures and arms can be combined in custom colors. An optional swivel (sold separately) can be attached to the dome to direct light where needed.

Mounting

Fixture can be surface mounted on a junction box on the wall.

Electrical

LED - Total system wattage is 14 Watts. The standard unit has a high efficiency driver that operates at 120 - 277V as standard.
Incandescent - For use with PAR LED or Incandescent lamps. (Lamp by others)

Arms

Available ARMS include:

- ARM1
- ARM2
- ARM3
- ARM4
- ARM5
- ARM6

Finish

Bronze, White, Black
 Custom colors optional

Options


- Globes
- Guard
- Wire Cage (only applicable for LG4016)
- Swivel

Specs for LED unit


Equivalent to	50W MH
Fixture Watts	14W
Lumens	>1100
Efficacy	79 lumens/watt

LED Life	100,000 hours
Certification	cCSAus
Color Temperature	5000K (standard)
Warranty	5 Years
Operating temperature	-40°C to +40°C


DIMENSIONS

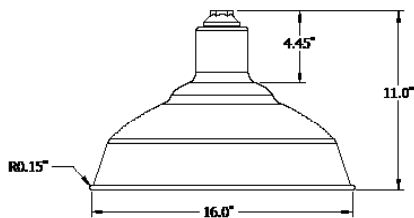


LG4016



VCS212A




VCS214DM

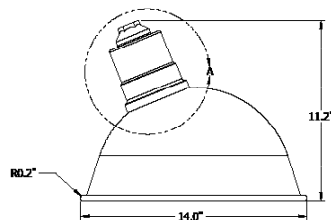


VCS214A




ARMS & ACCESSORIES

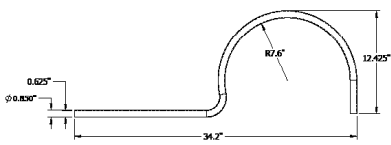


ARM 1

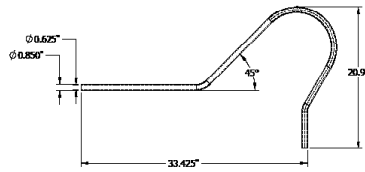


ARM 2




ARM 3

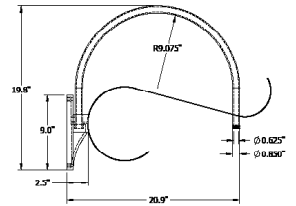

ARM 4

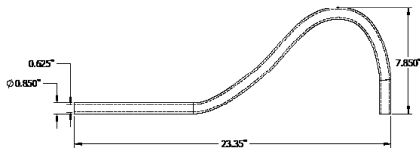


ARM 5



ARM 6



Swivel**



**LG401
Wire cage (optional)**

**Swivel is optional with ARM1, ARM2, ARM5 and ARM6

GLOBES & GUARDS (Options for use with A19 lamp for incandescent or for use with LED14 unit)




ORDERING GUIDE



VCS212A VCS214DM VCS214A LG4016	LED 14* INC**	VOLTAGE B - 120-277V* A - 120V	COLOR TEMP. 3K - 3000K 4K - 4000K 5K - 5000K*	ARMS ARM1 ARM2 ARM3 ARM4 ARM5 ARM6	SWIVEL SW - SWIVEL MOUNT Leave Blank - No Swivel mount	FINISH BLK - BLACK* BRZ - BRONZE* WHT - WHITE* CC - CUSTOM COLOR
--	------------------	--------------------------------------	--	--	--	--

** For Incandescent Unit, order Dome and Arm separately. State Finish for both Dome and Arm.

ORDERING GUIDE - ACCESSORIES
(*SOLD SEPARATELY)



* Standard configuration

GL100PR PRISMATIC GLASS

GL100F FROSTED GLASS

GL100 CLEAR GLASS

RGL100A (AMBER)

RGL100B (BLUE)

RGL100G (GREEN)

RGL100R (RED)

GL100PGO (POLYCARBONATE WHITE)

GD100CGS - GUARD

W616 - WIRE GUARD (only for LG401)

SWIVEL