



SL4-LED30

LED Strip Light

SPECIFICATIONS

| | |
|---------------------------|--|
| Watts | 31 |
| Lumens | 3962 |
| Efficacy | 127 Lm/W |
| Replaces Up To | 2 Lamp T8 |
| Color Temp** | Selectable - 3K, 4K, 5K |
| Certification | cULus, IP20 |
| Operating Temp | -30°C to +40°C |
| Voltage | 120-277V* |
| LED Life (L70) | >100,000 hours |
| Housing Material | Steel |
| Lens Material | Polycarbonate |
| Lens Type | Frosted |
| Mounting | Surface mount, suspended mount using linear ceiling pendant mount kit. |
| Total Harmonic Distortion | 7.4% |
| Power Factor | 0.993 |
| CRI | 80 |
| Internal Surge Protection | 2KV |
| Weight | 4.6 lbs |

* Standard Configuration

** Color temperature is selectable and can be changed on the fixture through a switch. The default switch setting is set to 4K on the fixture.



DESCRIPTION

The SL4-LED30 strip light provides a highly efficient lumen output of approx. 4000 lumens. The frosted linear lens provides uniform light distribution ideal for use in shops, coves and general area lighting.

APPLICATIONS



Shops



Cove Lighting



General Area Lighting

FEATURES

- Fixture can be set at a color temperature of 3000K, 4000K or 5000K while installing through a switch inside the housing
- Narrow, linear design with frosted lens for uniform light distribution
- Join up to 25 fixtures on a single circuit using easy connector steel plates. Fixtures are daisy chained with line wires fished through the housing continuous row.
- Options: dimming high frequency sensor (inside housing), wire cage, reflector wings, linear ceiling pendant mount kit


FULL SPECIFICATIONS

| DESCRIPTION | VOLTAGE (V) | INPUT POWER (W) | LIGHT OUTPUT | EFFICACY (Lm/W) | THD | PF | CRI |
|--------------------|-------------|-----------------|--------------|-----------------|------|-------|-----|
| SL4-LED30-B-VK-DIM | 120-277 | 31 | 3962 | 127 | 7.4% | 0.993 | 80 |


LEGEND

- B - 120-277V
- VK - Selectable CCT
- DIM - DIMMABLE

DIMENSIONS

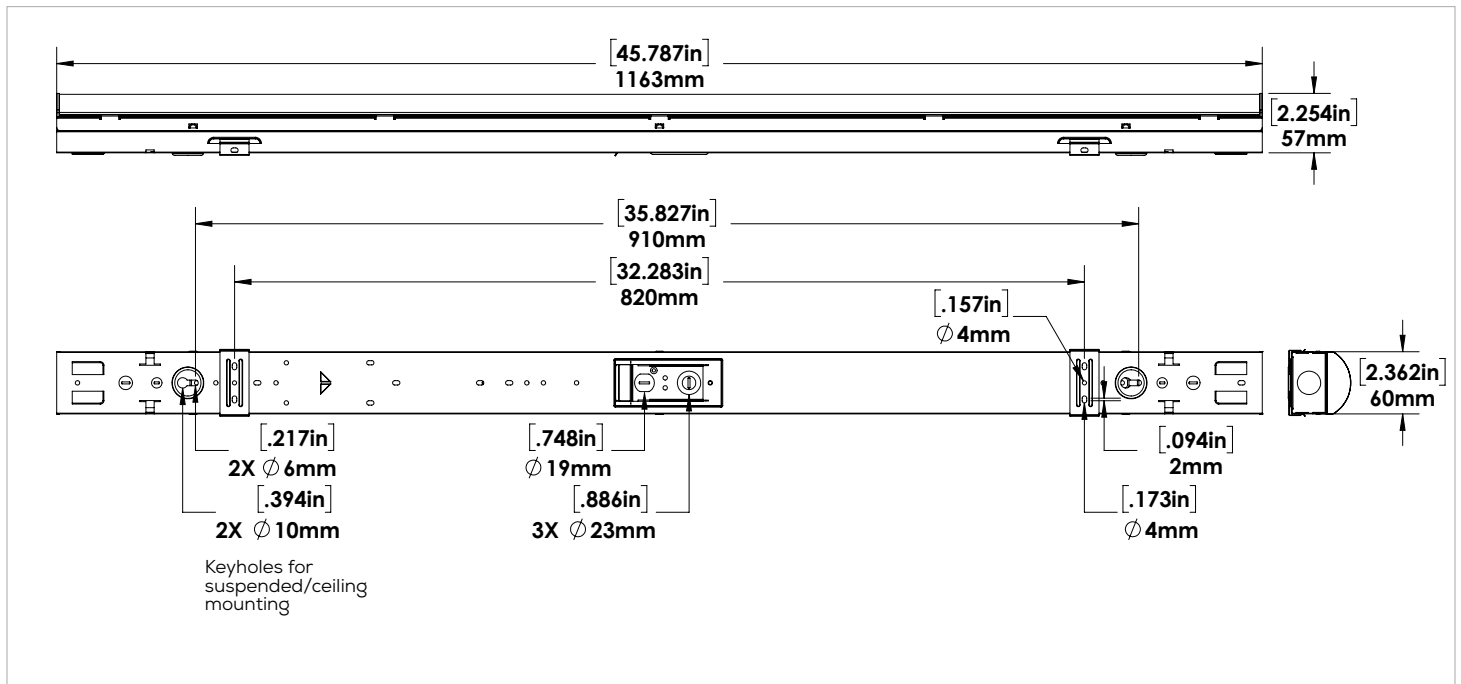

COLOUR SELECTABLE SWITCH

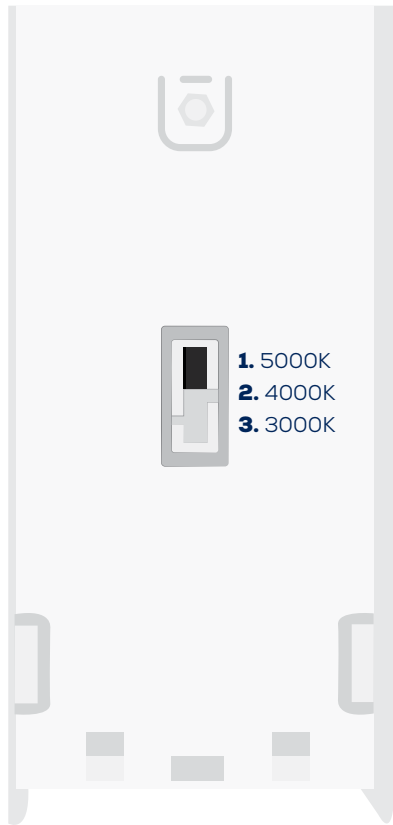

1. 5000K
2. 4000K
3. 3000K

5000K
4000K
3000K

(Default switch setting)

The switch is located inside of the fixture.

Easily change the colour temperature with the flip of a switch.

1. TOP position = 5000K
2. MIDDLE position = 4000K
3. BOTTOM position = 3000K

LINEAR CEILING PENDANT MOUNT KIT



Linear Ceiling Pendant Mount Kit

Contains 2 x 5 foot aircraft cables with ceiling mounting plates, fixture mounting rod and nut, 6 drywall anchors, and 6 screws.


SKU 051331

REFLECTOR WINGS




Reflector Wings Kit - Wings attach by inserting tabs into the cutouts on the fixture

SKU 051446

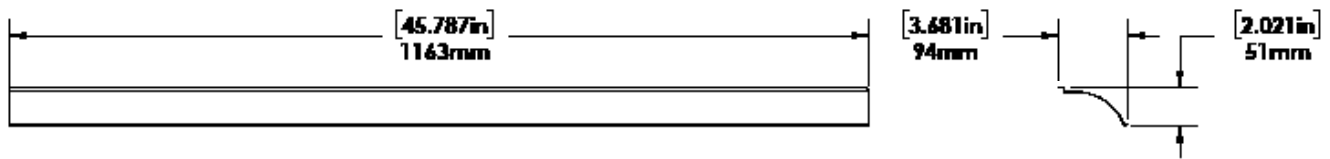


Reflector Wings Kit dimensions

WIRE CAGE

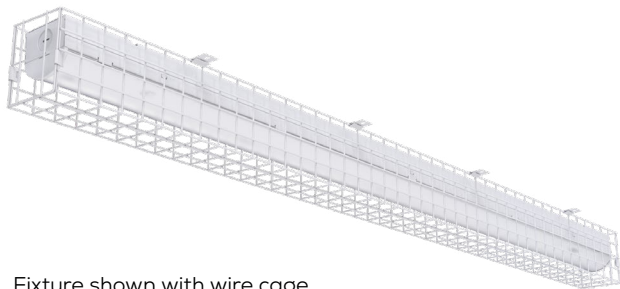

Fixture shown with wire cage

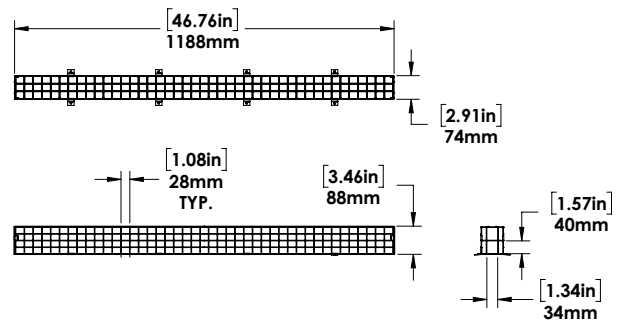

Wire Cage - To install, place wire cage over the fixture and screw the clips on to the mounting surface. SL4 has 8 clips. End caps of the wire cage are removable which allows contractor to connect multiple fixtures with wire cages seamlessly.

SKU 052114

ORDERING GUIDE

| | | | | | |
|--------------|-----------------|--|---------------------------|---|--|
| SL4 | LED30 | B | VK | DIM | |
| WATTS | VOLTAGE | COLOUR TEMP. | DRIVER | OPTIONS | |
| | B - 120 - 277V* | VK - COLOUR SELECTABLE* (can be changed to 3K, 4K, or 5K) | DIM - DIMMABLE DRIVER* | DHFS - Dimming High Frequency Sensor (factory installed inside the housing) | |

*Standard Configuration.

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

052114 SL4-LED/SLH4-LED WIRE CAGE

051331 LINEAR CEILING PENDANT MOUNT KIT

051446 SL4-LED REFLECTOR WINGS KIT - WHT