



ORA1-LED15

LED Wall/Flood Light



SPECIFICATIONS*

Watts	16W
Lumens	1510
Efficacy	97lm/W
Replaces Up To	70W MH 300W Quartz
Color Temp	3000K, 4000K*, 5000K
Certification	cULus, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 480V in wall mount
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	18.41
Power Factor	0.912
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

APPLICATIONS



Town Houses



Condos



Perimeter
Lighting



Shopping Malls




FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.

*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 4.


NOTE: Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.

DIMENSIONS

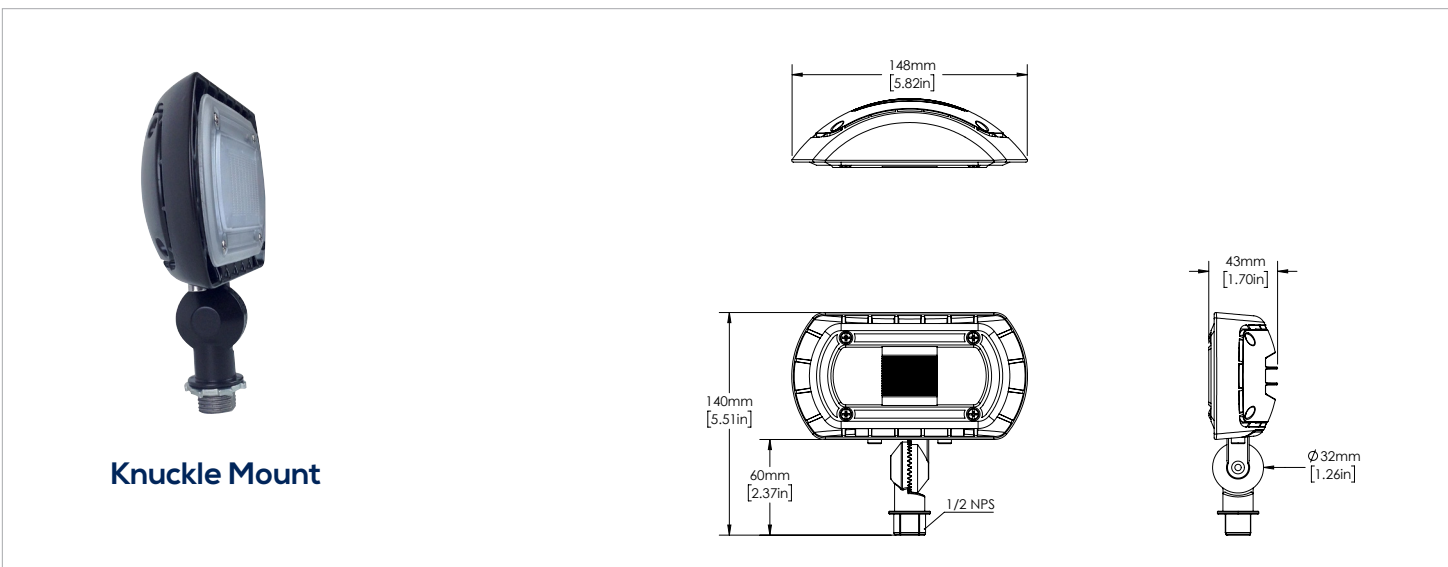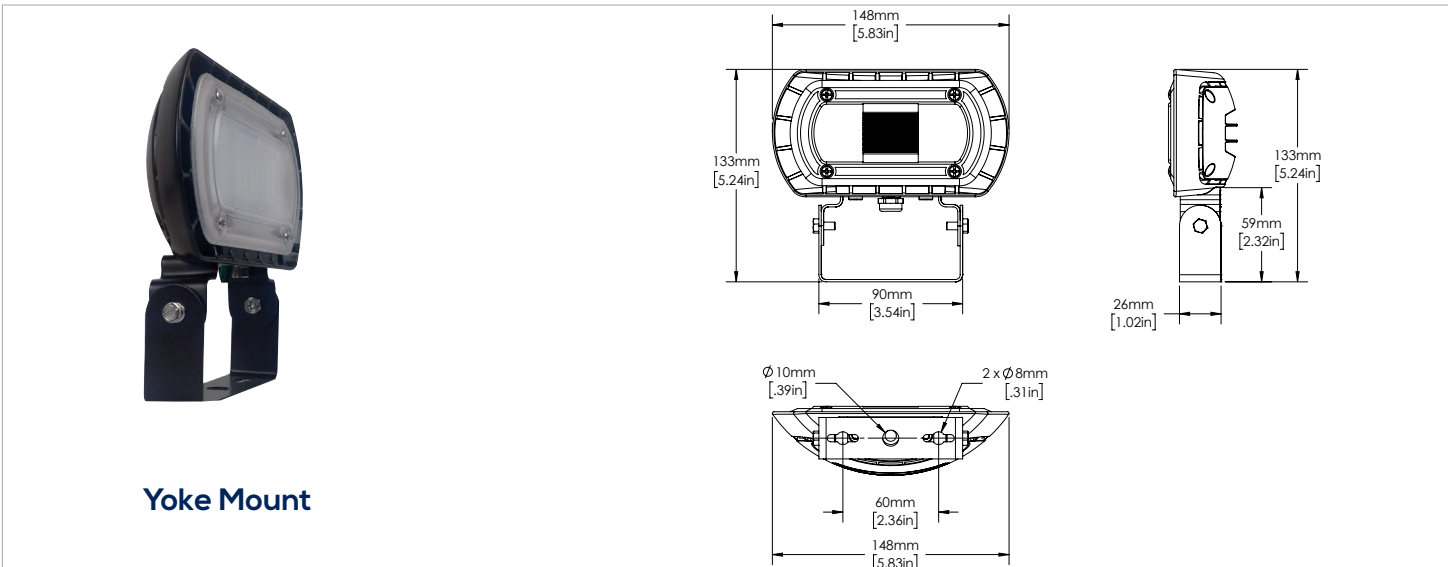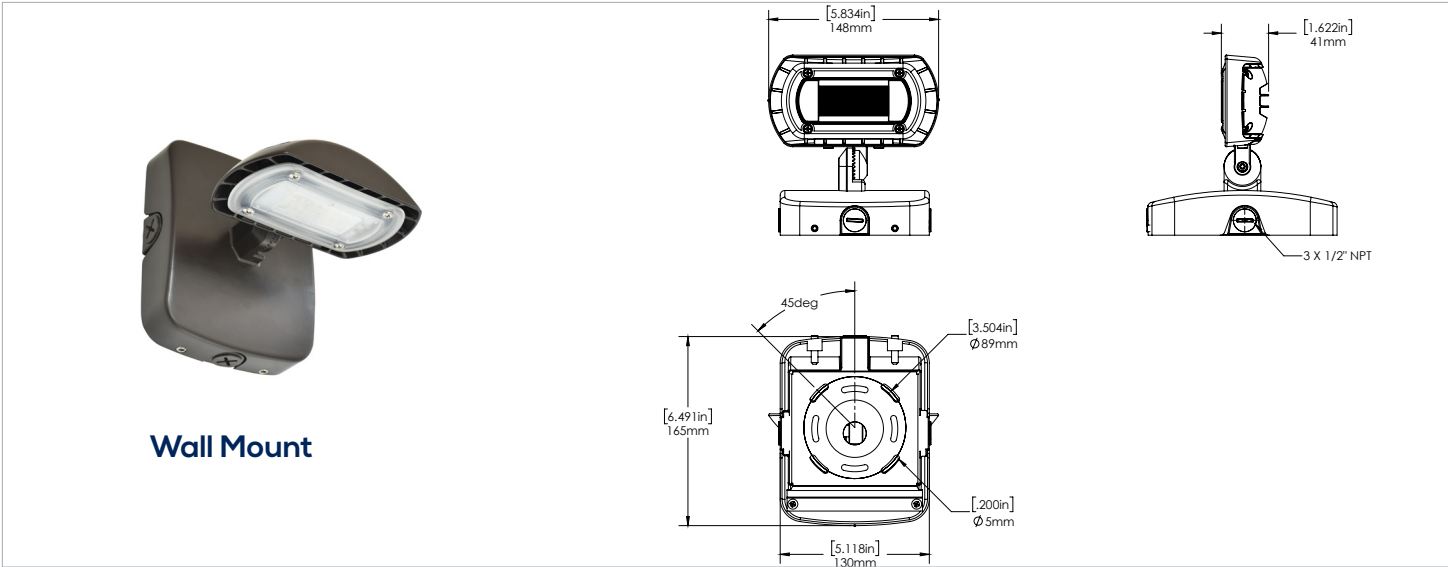


PHOTOMETRICS

ORA1-LED15 4K MOUNTED AT 8 FEET - WALL MOUNT ORIENTATION

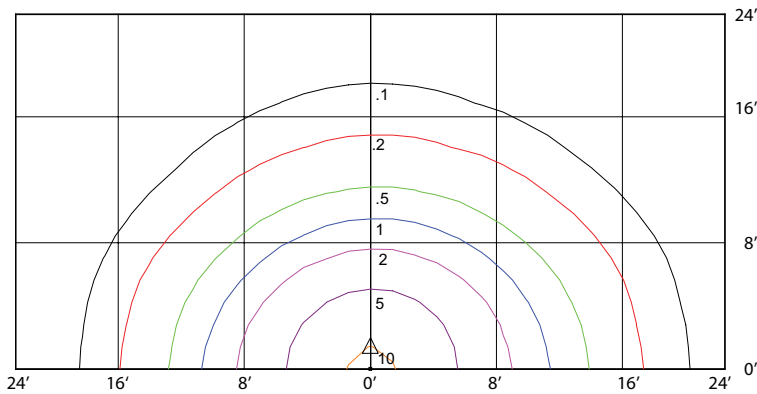


ARCHITECTURAL WALL MOUNT

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

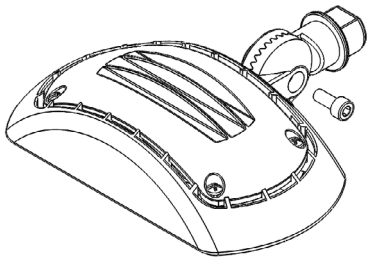

Step One


Remove screw from knuckle mount

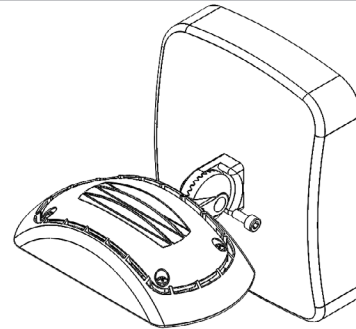

Step Two

Mount on bracket with wiring and tighten screw

480V WALL MOUNT

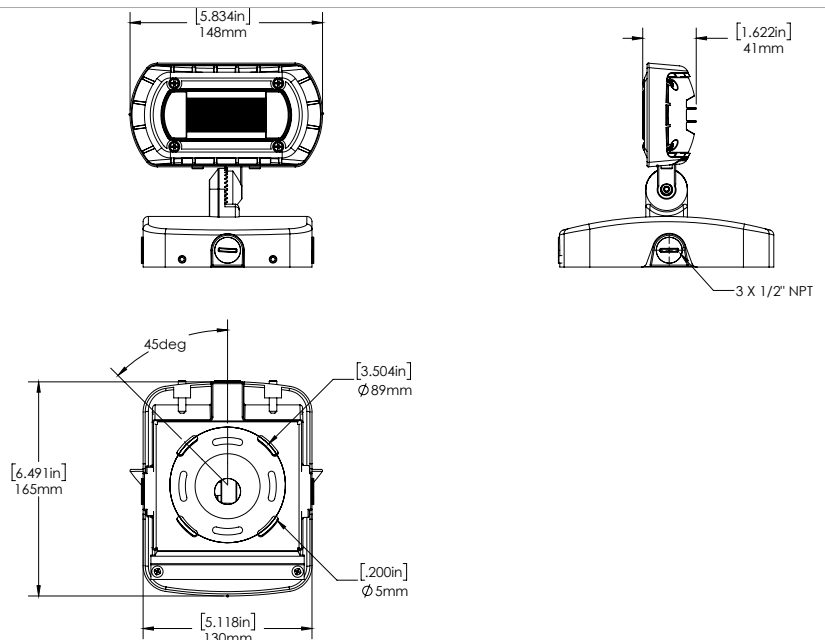

SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT (LM)	EFFICACY (Lm/W)	THD	PF	CCT (K)	(CRI)
ORA1-LED15-B-3K-XXX-XX	120-277	16	1487	94.0	18.4	0.917	3000	72.6
ORA1-LED15-B-4K-XXX-XX	120-277	16	1510	97.2	18.4	0.912	4000	72.9
ORA1-LED15-B-5K-XXX-XX	120-277	16	1538	98.0	18.6	0.913	5000	72.6
ORA1-LED15-L-3K-XXX-XX	480	17	1748	102.7	18.4	0.929	3000	72.5
ORA1-LED15-L-4K-XXX-XX	480	17	1771	103.9	18.3	0.926	4000	73.0
ORA1-LED15-L-5K-XXX-XX	480	17	1785	104.0	18.3	0.928	5000	72.8

DLC listed as Outdoor Full-Cutoff Wall-Mounted Area Luminaire and as Architectural Flood and Spot Luminaires

Legend

B- 120-277V, L-480V
 4K - 4000K
 XXX- Finish
 XX- Mounting

ORDERING GUIDE

ORA1					
WATTS	VOLTAGE	COLOR TEMP.	FINISH	MOUNTING	
LED15	B - 120 - 277V* L - 480V (Wall mount only)	3K - 3000K 4K - 4000K* 5K - 5000K	BRZ - BRONZE*	KN-Knuckle YK - Yoke WMC - Wall Mount with 3 conduit entries WMCB - Wall Mount for 480V	

* Standard configuration

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

ORA1/2 WALL MOUNT with 3 Conduit Entries Bronze

ORA1/2 Architectural Wall Mount Bracket without
conduit entries Bronze