



RAY6-LED

Bollard LED



IDEAL APPLICATIONS

- ✓ Walkways
- ✓ Parkettes
- ✓ Condos
- ✓ Townhouses

DESCRIPTION:

The RAY6-LED bollard is a round architectural bollard in a sleek design that provides uniform, even illumination. The RAY6 is available with a type V and III distributions.

FEATURES:

Construction

- Body is made from extruded aluminum and has a custom designed twist lock mechanism for secure and easy installation. The cast aluminum base is secured with stainless steel set screws. Body has a powder coat finish.

Optics

- Two light distributions available; Type V (360°) is standard. Type III (180°) is an option.

LEDs

- Colour temperature is 4000K standard, 5000K and 3000K are available as options.

Electrical

- Unit has high efficiency 120-277V drivers.

Finish

- Standard powder coat finish is Bronze, Custom colours are available upon request.
- Luminaire has field adjustable lumen settings of 25W, 12W, and 8W. Default setting of fixture is 25W.

SPECIFICATIONS

RAY6-LED25A8


Watts (W)	26
Lumens (Maximum)	3550
Efficacy (Lm/W)	136.2
Color Temp	3000K, 4000K*, 5000K
Voltage	120-277V*
CRI	75
THD	16.9%
Dimming	0-10V Dimming
PF	0.9
LED Life @ 100,000 Hours	76%
Beam Distribution	Type III (180°), Type V (360°)*
Finish	Bronze*, Custom Color
Housing Details	Aluminum
Lens Details	Clear PC Lens
Operating Temp.	-30°C to 40°C
Certifications	UL, Wet Location, IP65

* Standard Configuration


Note: Specs mentioned above are for 120-277V, 4000K CCT in 360 degrees beam options. Please refer to the table on page 4 for specifications of other configurations



DIMENSIONS:

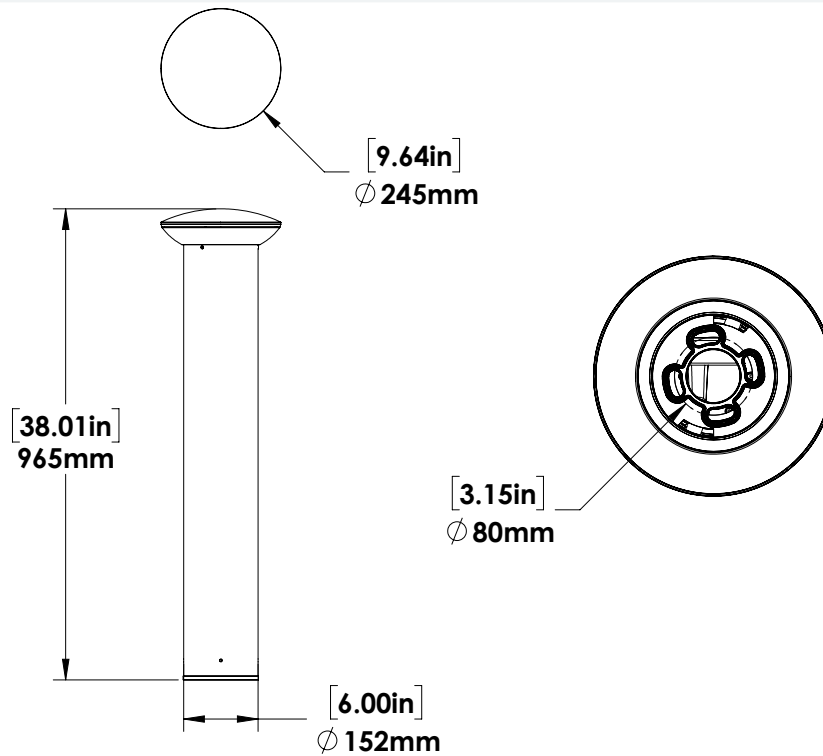

TWIST & LOCK MECHANISM

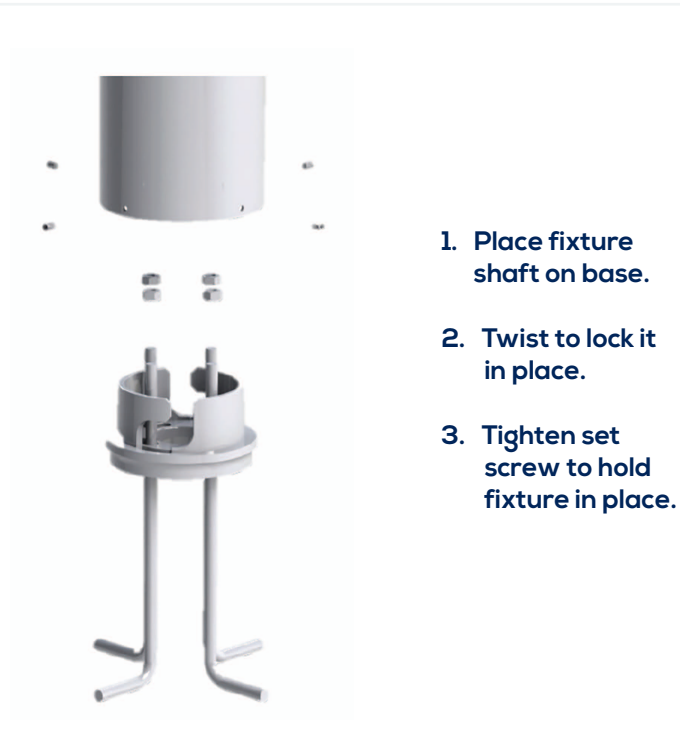

360 DEGREES ADJUSTABLE HEAD

AMPERAGE DRAW & SURGE PROTECTION					
CURRENT (A) FOR MAXIMUM WATTAGE					SURGE PROTECTION (kV)
	120V	208V	240V	277V	120-277V
RAY6-LED	0.22A	0.13A	0.11A	0.1A	2kV
LUMEN ADJUSTABLE SETTINGS					
	RAY6-LED				
WATTS (W)	8		12		26
LUMENS (Maximum Lm)	1113		1669		3625
TM-21 ESTIMATED LUMEN MAINTENANCE					
	50,000 Hours		75,000 Hours		100,000 Hours
RAY6-LED	87.2%		81.2%		75.6%
WEIGHTS (lbs)					
RAY6-LED	14.8				

SPECIFICATIONS								
Model Number	Voltage (V)	Power (W)	Light Output (lm)	Efficacy (lm/W)	THD (%)	PF	CCT (K)	B-U-G
RAY6-LED25A8-B-3K-360-XXX-DIM	120-277	26	3309	127.0	16.9	0.903	3000	1-2-1
RAY6-LED25A8-B-3K-180-XXX-DIM	120-277	26	3337	128.1	16.9	0.903	3000	1-2-2
RAY6-LED25A8-B-4K-360-XXX-DIM	120-277	26	3550	136.2	16.9	0.903	4000	1-2-1
RAY6-LED25A8-B-4K-180-XXX-DIM	120-277	26	3580	137.4	16.9	0.903	4000	1-2-2
RAY6-LED25A8-B-5K-360-XXX-DIM	120-277	26	3625	139.1	16.9	0.903	5000	1-2-1
RAY6-LED25A8-B-5K-180-XXX-DIM	120-277	26	3655	140.3	16.9	0.903	5000	1-2-2

ORDERING GUIDE:

RAY6-LED	LED25A8					DIM	
	Wattage	Voltage	Color Temp.	Optics	Finish	Dimming	Misc.
	LED25A8	B - 120-277V*	3K - 3000K	360 - Type V	BRZ - Bronze*	DIM - 0-10V Dimming	BLANK
			4K - 4000K*	180 - Type III	CC - Custom Color		SP10 - 10kV Surge Protection
			5K - 5000K				

* Standard Configuration