



## RAY8-LED

Bollard LED



### IDEAL APPLICATIONS

- ✓ Walkways ✓ Parkettes ✓ Condos ✓ Townhouses

### DESCRIPTION:

The RAY8-LED bollard is a round architectural bollard in a sleek design that provides uniform, even illumination. The RAY8 is available with a type V and III distributions.

### FEATURES:

#### Construction

- Body is made from extruded aluminum and has a custom designed twist lock mechanism for secure and easy installation. The cast aluminum base is secured with stainless steel set screws. Body has a powder coat finish.

#### Optics

- Two light distributions available Type III (180° | RAY8-LED20) and Type V (360° | RAY8-LED35).

#### LEDs

- Colour temperature is 5000K standard, 4,000K and 3,000K are available as options.

#### Electrical

- Unit has high efficiency 120-277V drivers.

#### Mounting

- Cast aluminum base is secured with stainless steel screws.

#### Finish

- Standard powder coat finish is Bronze, Custom colors are available upon request.


SPECIFICATIONS	RAY8-LED20	RAY8-LED35*
Watts (W)	20	34
Lumens (Maximum)	2715	4589
Efficacy (Lm/W)	133.1	135.9
Beam Distribution	Type III - 180°	Type V - 360°*
Color Temp	3000K/4000K*/5000K	
Voltage	120-277V*	
CRI	75	
THD	16.9%	
Dimming	0-10V Dimming	
PF	0.9	
LED Life @ 100,000 Hours	76%	
Finish	Bronze*, Custom Color	
Housing Details	Aluminum	
Lens Details	Clear PC Lens	
Operating Temp.	-30°C to 40°C	
Certifications	UL, Wet Location, IP65	

\* Standard Configuration

Note: Specs mentioned above are for 120-277V, 4000K CCT. Please refer to the table on page 3 for specifications of other configurations



## DIMENSIONS:

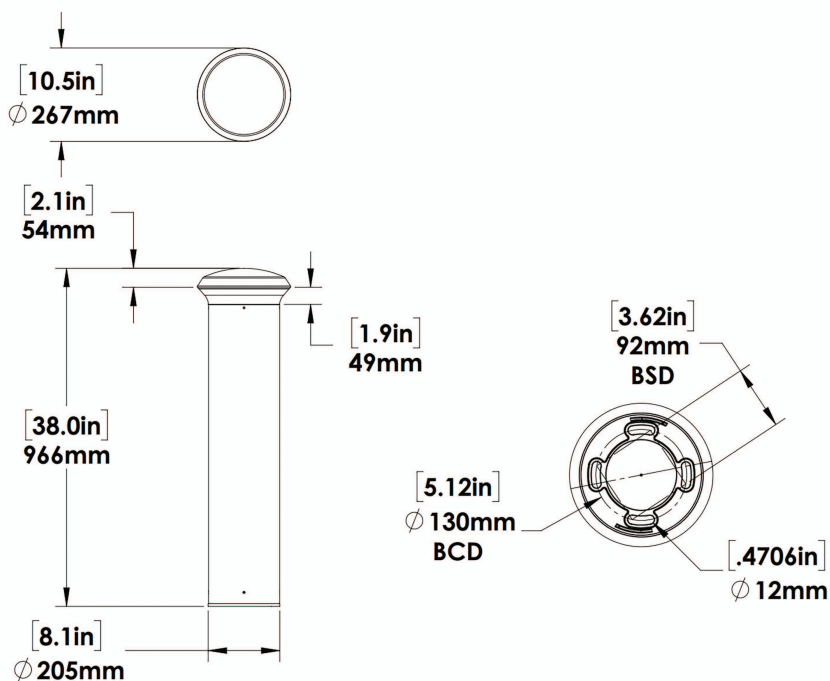

## 360 DEGREES ADJUSTABLE HEAD



AMPERAGE DRAW & SURGE PROTECTION					
CURRENT (A) FOR MAXIMUM WATTAGE					SURGE PROTECTION (kV)
	120V	208V	240V	277V	120-277V
RAY8-LED	0.31A	0.18A	0.16A	0.14A	2kV
TM-21 ESTIMATED LUMEN MAINTENANCE					
	50,000 Hours		75,000 Hours		100,000 Hours
RAY8-LED	87.2%		81.2%		75.6%
WEIGHTS (lbs)					
RAY8-LED	17.6				

SPECIFICATIONS								
Model Number	Voltage (V)	Power (W)	Light Output (lm)	Efficacy (lm/W)	THD (%)	PF	CCT (K)	B-U-G
RAY8-LED20-B-3K-180-XXX-DIM	120-277	20	2531	124.1	16.9	0.903	3000	1-3-2
RAY8-LED20-B-4K-180-XXX-DIM	120-277	20	2715	133.1	16.9	0.903	4000	1-3-2
RAY8-LED20-B-5K-180-XXX-DIM	120-277	20	2772	135.9	16.9	0.903	5000	1-3-2
RAY8-LED35-B-3K-360-XXX-DIM	120-277	34	4277	126.7	16.9	0.903	3000	2-3-2
RAY8-LED35-B-4K-360-XXX-DIM	120-277	34	4589	135.9	16.9	0.903	4000	2-3-2
RAY8-LED35-B-5K-360-XXX-DIM	120-277	34	4686	138.7	16.9	0.903	5000	2-3-2

## ORDERING GUIDE:

RAY8-LED						DIM	
Fixture	Wattage	Voltage	Color Temp.	Optics	Finish	Dimming	Misc.
RAY8-LED	LED35	B - 120-277V*	3K - 3000K	360 (Type V)*	BRZ - Bronze*	DIM - 0-10V Dimming	BLANK
	LED20		4K - 4000K*	(Only Available in LED35)	CC - Custom Color		SP10 - 10kV Surge Protection
			5K - 5000K	180 (Type III)  (Only available in LED20)			

\* Standard Configuration