



# LFY4-LED

## Linear Vaporproof



Introducing our linear vaporproof LED fixture, designed for versatility and durability in demanding environments. With adjustable lumen and color temperature settings and wide voltage range ensures compatibility to suit application in industrial and commercial spaces. The fixture combines rugged construction and contractor friendly installation and advanced features to deliver reliable, tailored illumination.

### IDEAL APPLICATIONS

- ✓ **Food processing & Storage**
- ✓ **Live stock barns**
- ✓ **Agricultural applications**
- ✓ **Underground Parking Garages**
- ✓ **Warehouse**
- ✓ **Industrial application**

### SPECIFICATIONS

	LFY4-LED40A20	LFY4-LED60A40
<b>PERFORMANCE</b>		
<b>Light Output</b>	6400/4300/2850 lm	9100/7550/6000 lm
<b>Efficacy</b>	144 lm/W	151 lm/W
<b>CCT</b>	CCT Selectable - 3500K/4000K/5000K	
<b>Beam Angle</b>	113°	
<b>CRI</b>	84	
<b>Replaces Up To</b>	2 Lamp T8	2 Lamp T5HO
<b>ELECTRICAL</b>		
<b>Wattage</b>	41/30/20 W	60/50/40 W
<b>Voltage</b>	120-277 V	
<b>Surge Protection</b>	2kV (Built-in Driver) as per IEC/EN 61000-4-5	
<b>Power Factor</b>	>0.96	
<b>THD</b>	<17%	
<b>Dimming</b>	0-10V (Continuous dimming to 10% or below)	
<b>LED Life (L70)</b>	170,000 Hrs	
<b>Battery Backup</b>	8W Battery Back Up (Optional)	
<b>CONTROLS</b>		
<b>Multifunction Sensor</b>	Dimming High Frequency Motion Sensor	
<b>AMBIENT OPERATING TEMPERATURE</b>		
<b>Fixture</b>	-40°F to +104°F (-40°C to 40°C)	
<b>With Battery Back Up</b>	50°F to +104°F (10°C to +40°C)	
<b>With Motion Sensor</b>	-40°F to +104°F (-40°C to 40°C)	
<b>MOUNTING</b>		
Surface/Ceiling Mount		
Adjustable Stainless Steel Surface Mount Clips included in the box		

	LFY4-LED40A20	LFY4-LED60A40
<b>CONSTRUCTION</b>		
<b>Multifunction Sensor</b>	Dimming High Frequency Motion Sensor	
<b>Housing</b>	Polycarbonate; 5VA Flammability rated as per UL94; Outdoor rated (fI) as per UL746C	
<b>Lens</b>	Frosted Polycarbonate; Outdoor rated (fI) as per UL746C	
<b>Clips</b>	Stainless Steel Clips (x8) - Quick release*, Mechanical release (sold separately)	
<b>Finish</b>	Grey	
<b>Predrilled Conduit Entries</b>	Two (one at each end); Fits PG 13.5 cable gland; suitable for up to 5x18AWG Service Cables	
<b>Guide Mark</b>	One at Center from inside; Two adjacent to the center pilot hole	
<b>Electrical Cable lengths</b>	1' input LED driver cable length	
<b>CERTIFICATIONS</b>		
cETLus certified per UL1598 & CSA C22.2 NO. 250.0:21, DLC Premium, DLC Standard		
Wet Location, IP66, NEMA4X, NSF, IK10		
<b>DEFAULT SETTINGS</b>		
<b>CCT</b>	4000K	
<b>Wattage</b>	41W	60W

#### Note:

Electrical and Light Performance data is based on LM79 test report at 4000K and 120V.


This product is not suitable for Car Washes. Please see our LFW-LED series for Car Wash applications



# ORDERING GUIDE



Fixture	Wattage	Voltage	Color Temp.	Dimming	Motion Sensor	Emergency Battery Backup
LFY4	LED40A20 LED60A40	B - 120-277V	VK- CCT Selectable - 3500K/4000K/5000K	DIM - 0 -10V Dimming	Blank* - No Motion Sensor  DHFS-Dimming High Frequency Motion Sensor	Blank* - No Emergency Battery Back Up  BBK8 - 8W Battery Back Up

STOCK CODE		INCLUDED IN THE BOX
<b>056640</b>	LFY4-LED40A20-B-VK-DIM	<b>Surface Mount Installation Accessories (x2)</b> 
<b>056641</b>	LFY4-LED40A20-B-VK-DIM-DHFS	
<b>056660</b>	LFY4-LED60A40-B-VK-DIM	
<b>056661</b>	LFY4-LED60A40-B-VK-DIM-DHFS	

ACCESSORY SOLD SEPARATELY					
<b>052267</b>	RC-100 MOTION SENSOR REMOTE CONTROL		<b>053122</b>	LFY4-LED SST CLIPS KIT (x8) - MECHANICAL RELEASE	
<b>053129</b>	LFY4 WALL MOUNT BRACKET		<b>051331</b>	LINEAR CEILING PENDANT MOUNT KIT (2x5ft)	

	MAX AMPERAGE DRAW (A)			
	120V	208V	240V	277V
<b>LFY4-LED40A20</b>	0.359	0.207	0.179	0.155
<b>LFY4-LED60A40</b>	0.525	0.303	0.263	0.227

	LUMEN MAINTENANCE		
	L90	L80	L70
<b>LFY4-LED40A20</b>	55,000 Hrs	100,000 Hrs	170,000 Hrs
<b>LFY4-LED60A40</b>	52,000 Hrs	100,000 Hrs	170,000 Hrs

Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 calculations.



### MOTION SENSOR SPECIFICATIONS

<b>Maximum Mounting Height/Range</b>	
<b>Maximum Detection Angle</b>	360°
<b>Recommended Mounting Height</b>	8ft to 12ft
<b>Sensor Detection Range</b>	26ft at 8ft mounting

### DEFAULT MOTION SENSOR SETTINGS

BRIGHTNESS	SENSITIVITY	HOLD TIME	DAYLIGHT SENSOR	STAND-BY DIM	STAND-BY TIME
100%	100%	10 Seconds	Disabled	DIM: 50%	60 minutes

**Note:** \* Applicable to light fixtures with Motion Sensors (DHFS)

### EMERGENCY BATTERY BACKUP SPECIFICATIONS

<b>Rated Input Voltage</b>	277V AC, 50/60HZ
<b>Input current</b>	20-100mA
<b>Input power</b>	8W
<b>Power Factor</b>	0.6 @ 100VAC, 0.5 @347 VAC
<b>Output Power (Emergency Mode)</b>	9W±10%, Constant Power
<b>Recharge Current</b>	0-200mA
<b>Recharge Time</b>	24 Hours
<b>Discharge Time</b>	90 Minutes
<b>Maximum Case Temperature</b>	158°F (70°C)
<b>Ambient Operating Temperature</b>	50°F - 140°F (10°C-60°C)

**Note:**


Lumen output with emergency battery backup can be calculated by multiplying battery power output with efficacy of fixture.

## PHOTOMETRIC PLOTS

**LFY4-LED40A20-B-VK-DIM (5000K 120V)**  
MOUNTED AT 8 FEET

LUMENS 6035

MAX CALCULATED VALUE 30.35Fc

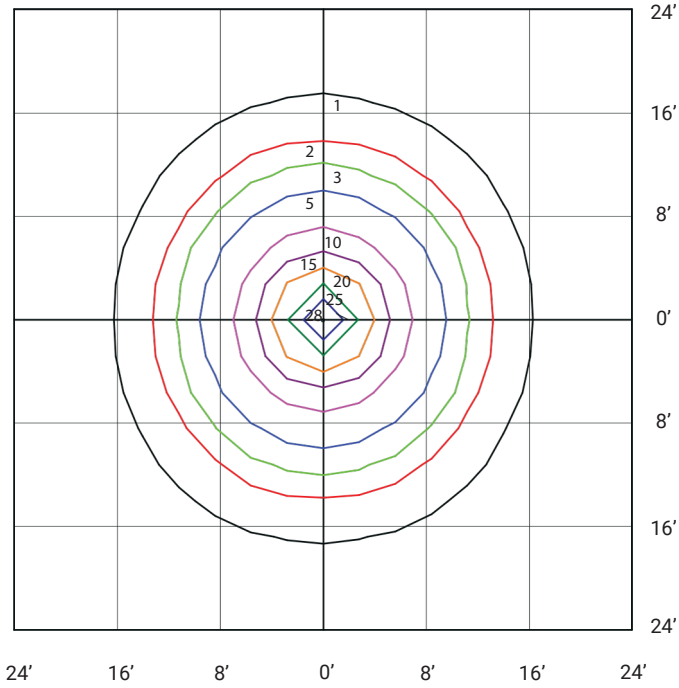

**LFY4-LED60A40-B-VK-DIM (5000K 120V)**  
MOUNTED AT 10 FEET

LUMENS 8839

MAX CALCULATED VALUE 28.29Fc

