

## INSTALLATION INSTRUCTIONS



**ELECTRICAL SHOCK HAZARD**

**READ, UNDERSTAND, and FOLLOW** these instructions before installing the equipment.

### WARNING

Disconnect the Electrical supply power at the service panel (fuse or circuit breaker box). Failure to do so could result in serious injury or death. Only qualified electricians should install this fixture and the installation **MUST** conform to the Electrical Code and all local codes and ordinances. Ensure that only proper tools, materials, and equipment are used to complete the installation.

### SAFETY

- Proper grounding is required to ensure personal safety
- Fixture should be mounted in locations where unauthorized personnel will not readily subject it to tampering.
- Do not use this equipment for anything other than its intended purpose.
- Servicing this equipment should be performed by qualified service personnel.
- This product contains chemicals known to the state of California to cause cancer, birth defects, and/or other reproductive harm, thoroughly wash hands after installing, handling, cleaning or otherwise touching this product.
- Save these instructions

### INSTALLATION

Supply wire: Min 70°C when connecting wire leads in junction box Min 105°C when connecting wire leads inside the fixture.

1. Attach fixture to outdoor junction box cover.
2. Attach the cover and fixture to the box making sure that all wires are contained inside the box and that the cover is properly sealed to prevent entrance of moisture.
3. In order to comply with established electrical code, the installer must seal the area around the mounting plate and the wall, with silicone sealant to provide a watertight seal.
4. Make wire connection with supply wires in a waterproof junction box.
5. Rotate fixture in horizontal plane to desired area to be illuminated.

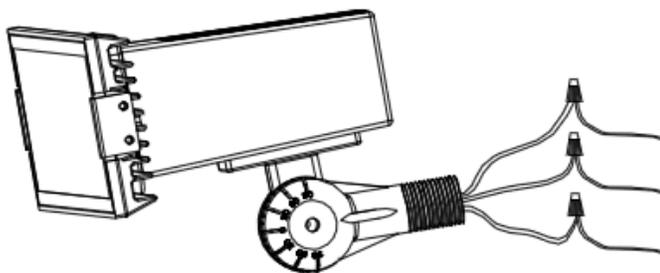


Figure 1

### ADDITIONAL SAFETY PRECAUTIONS:

- Fixture is for outdoor use and should not be used in areas of limited ventilation or high-ambient temperature.
- Fixture should be ceiling mounted or wall mounted.
- Fixture should be located at least 12" away from any combustible materials.
- Fixture should not be recessed.