

Wall light

The WRUD8 is an architectural, specification grade up-down light with advanced optics available in three sizes and custom color finishes.



APPLICATIONS

Ideal for perimeter lighting, commercial properties, residential buildings, townhouses & condos, schools, and warehouses.

Project	
Туре	
Date	
Notes	

SPECIFICATIONS

Construction

WRUD8 has an extruded aluminum housing with a powder coat paint finish. The fixture has a clear tempered glass lens which is held in place with a gasket and three stainless steel screws making it approved for wet locations.

Mounting

The fixture can be mounted directly on to the wall and has an easy mounting system. The galvanized steel plate is attached to the wall with 4 screws. The fixture then slides under the two pins and is secured by the two set screws at the bottom.

Optics

The fixture has a standard color temperature of 5000K. 4000K and 3000K are available as options. The fixture is available with a narrow, medium, wide or extra wide beam.

Electrical

The standard unit has a high efficiency driver that operates at 120-277V.

Finish

Custom colors available.

Watts	74W
Lumens	7,312
Efficacy	99 lumens/watt


Operating Temp	-40°C to +40°C
LED Life	100,000 hours
Color Temp.	5000K (standard), 4000K, 3000K (option)
Warranty	5 Years
Certification	Approved to uL/CSA standards
Power Factor	0.99
ССТ	>80
Total Harmonic Distortion	<20%


Diffusion lens



DIMENSIONS









EASY INSTALLATION

Step 1: Attach steel plate on the wall with 4 screws




Step 2: Slide fixture under the two pins till it locks in



Step 3: Secure with 2 set screws on the bottom



ORDERING GUIDE

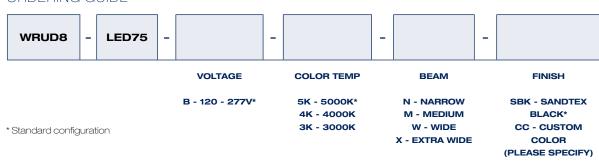

^{*} Standard configuration